

## TEA-FOR-TWO®

### 5.5' BATH WHIRLPOOL K-856-H2 ALSO K-856-LH, K-856-RH


#### Features

- Cast iron with Safeguard® finish
- Variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjets™
- Less all trim
- 66" (167.6 cm) x 36" (91.4 cm) x 24" (61 cm)

#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1
- ASME A112.19.7M
- UL 1795

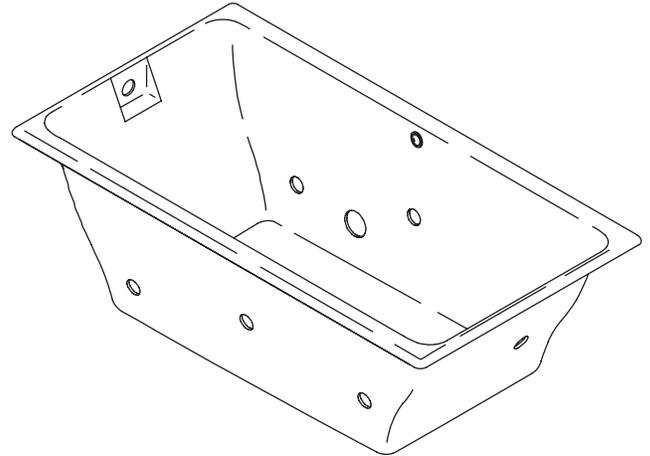

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

#### Specified Model

Model	Description	Colors/Finishes	
K-856-H2	5.5' bath whirlpool – drop-in rim style	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-856-LH	5.5' bath whirlpool with integral flange – left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-856-RH	5.5' bath whirlpool with integral flange – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

#### Required Accessories

K-9698	Jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
K-7147-AF	Clearflo pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

#### Recommended Accessories

K-587	Undermount installation kit (template and installation instructions)	<input type="checkbox"/> NA
-------	--	-----------------------------

#### Product Specification

The bath whirlpool shall be 66" (167.6 cm) in length, 36" (91.4 cm) in width, and 24" (61 cm) in height. Bath whirlpool shall be made of cast iron with Safeguard® finish. Bath whirlpool shall have 8 Flexjets, a variable speed pump with 1.5 kW heater, back-lit user keypad, and remote control. Bath whirlpool shall be less all trim. Bath whirlpool shall be Kohler Model K-856-\_\_\_\_\_-\_\_\_\_\_.

# TEA-FOR-TWO®

## Technical Information

Fixture*:			
Bathing well:			
Basin area	45" (114.3 cm) x 25" (63.5 cm)		
Top area	58" (147.3 cm) x 29" (73.7 cm)		
Weight	510 lbs (231.3 kg)		
To overflow:			
Water depth	19-1/2" (27.3 cm)		
Capacity (to overflow)	105 gal (397.5 L)		
* Approximate measurements for comparison only.			
Pump	kW	V	A*
	1.5	240	11
* Approximate measurements for comparison only.			

## Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	208-240 V, 20 A, 50/60 Hz
--------------	---------------------------

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 86 lbs/square foot (418 kg/square meter) loading.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

A pump/control access panel is required.


For a drop-in installation, the cut-out dimension is 64-1/2" (163.8 cm) x 34-1/2" (87.6 cm).

For an undermount installation, the K-587 template is required.

The hot water supply should be 70% of capacity or greater. Installations will vary.

**K-856-H2**

No change in measurements if connected with drain illustrated. (K-7147-AF or K-7147M-AF)

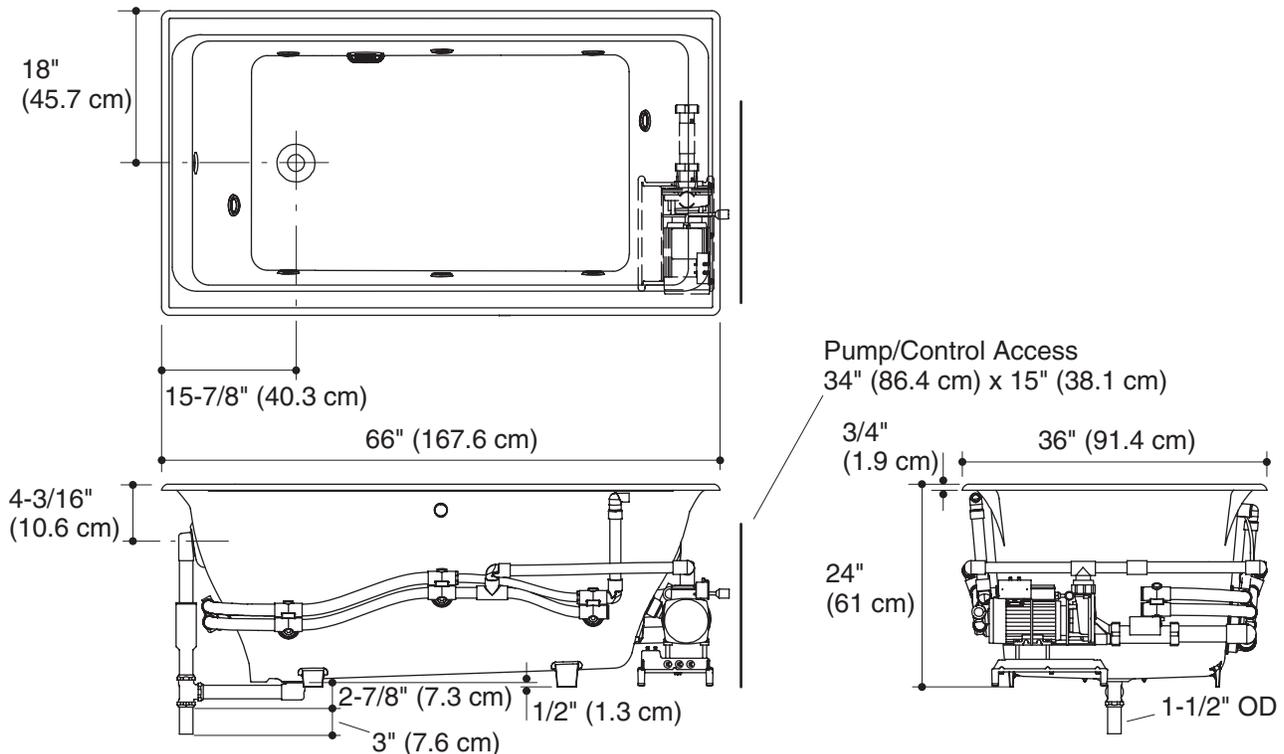

## Product Diagram