


### Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings
- Slotted overflow for maximum bathing depth
- 122 BubbleMassage™ airjets
- Blower motor with 300 W heater and electronic user control
- Zones of Control™ concentrates massage at back, midsection, or feet
- Molded lumbar support for comfort
- Available with chromatherapy [-GCW]
- Drop-in installation or under-mountable
- Center drain
- 72" (1829 mm) x 42" (1067 mm) x 23" (584 mm)

### 6' BUBBLEMASSAGE™ BATH WITH BASK™ K-1174-GW ALSO K-1174-GCW

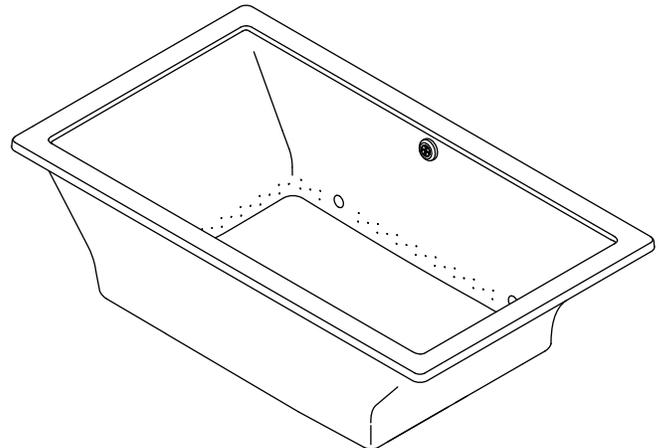

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E662
- UL 1795
- ASTM E162
- ASME A112.19.7/CSA B45.10

### Colors/Finishes

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1174-GW	6' BubbleMassage bath with Bask – without chromatherapy	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1174-GCW	6' BubbleMassage bath with Bask – with chromatherapy (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Required Accessories				
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-592	Under-mount kit			<input type="checkbox"/> NA
K-1491	Pillow	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-1601	Footstop (cont.)	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____

### Product Specification

The acrylic BubbleMassage bath shall be 72" (1829 mm) in length, 42" (1067 mm) in width, and 23" (584 mm) in height. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall be for drop-in installation or under-mountable. Bath shall have a blower motor with 300 W heater, and electronic user control. Bath shall have 122 BubbleMassage airjets, and reversible drain. Bath shall have slotted overflow for maximum bathing depth, and molded lumbar support for comfort. Bath shall be with Zones of Control feature, which concentrates massage at back, midsection, or feet. Bath shall be available with chromatherapy [-GCW]. BubbleMassage bath shall be Kohler Model K-1174-\_\_\_\_\_-\_\_\_\_\_.

