


G90 SLIDEBAR KIT K-98361



Features

- Finish is engineered to resist corrosion and daily wear
- Kit includes slidebar, shower hose, and multifunction handshower
- Adjustable mounting brackets on slidebar provide installation flexibility
- Lightweight handshower designed for easy use and added mobility
- 3-function handshower with wide coverage, intense drenching, and targeted spray options
- MasterClean™ sprayface is easy to clean
- Superior quality 1/2" brass hose fittings are built to last
- Covered by KOHLER lifetime limited warranty
- Handshower offers 2.0 gal/min (7.6 l/min) maximum flow rate
- 24" (610 mm) slidebar length offers a custom shower at various heights

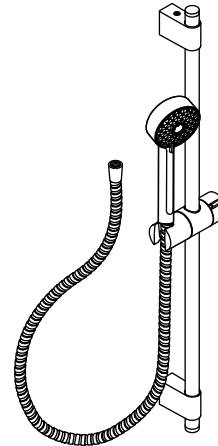

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- EPA WaterSense®

Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel

Specified Model

Model	Description	Colors/Finishes	
K-98361	G90 Slidebar kit	<input type="checkbox"/> CP	<input type="checkbox"/> BN

Product Specification

The slidebar kit shall be 24" (610 mm) in height offering a custom shower at various heights. Kit shall feature adjustable mounting brackets providing installation flexibility. Kit shall feature a finish engineered to resist corrosion and daily wear. Kit shall feature lightweight handshower designed for easy use and added mobility. Kit shall feature 3-function handshower with wide coverage, intense drenching, and targeted spray options. Handshower offers 2.0 gal/min (7.6 l/min) maximum flow rate. Kit shall feature MasterClean spray nozzles to prohibit mineral build-up for easy cleaning. Kit shall have superior quality 1/2" brass hose fittings built to last. Kit shall be covered by the KOHLER lifetime limited warranty. Slidebar kit shall be Kohler Model K-98361-_____.

AWAKEN™

Installation Notes


Install this product according to the installation guide.

Mount the sidebar to stud framing or install backing support.

For tile or other solid finish surfaces: Pre-drill mounting holes through surface material only; do not drill into the stud.

For drywall surface: No pre-drill is required.

NOTE: The mounting brackets can be adjusted to align with existing holes for retrofit installations.

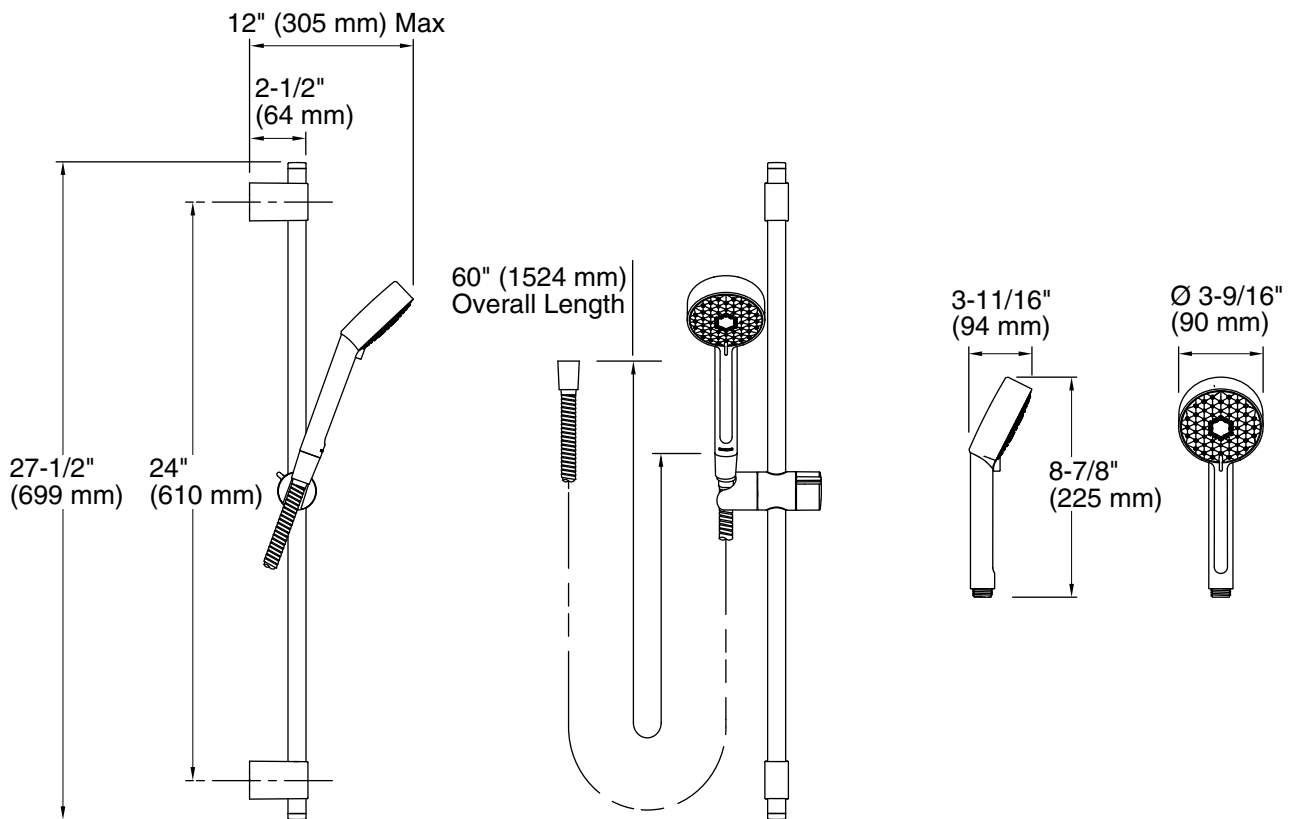

Product Diagram