

INSTALLATION INSTRUCTIONS

For Model P4440-084 / P4440-37B (Portable Unit)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


WARNING

- Risk of shock, do not plug in the unit before assembly is complete.
- Do not exceed the maximum wattage rating. (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
- Before you begin assembly of your new fixture, please follow the instruction manual step by step

MOUNTING THE LUMINAIRE, PLUG VERSION (Fig 1), For hardware version see Fig.2 & Fig.3

1. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Using the backplate as a template, pre-drill the holes for the drywall anchors.
3. Secure mounting plate (B) using screws (C) and drywall anchors (A) to the wall.
4. Place the fixture body (D) over mounting plate (B) and secure with screws (E).
5. Install the cord cover bracket (H) with screws (I) and anchors (A) to the wall. Fix the cord into the cord cover (J) and snap the cord cover (J) into the bracket (H).
6. Install the light bulb (F) (Bayonet Halogen GU10 included) with suction cup (G) in accordance with the lamp's specifications. (DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)

Fig 1

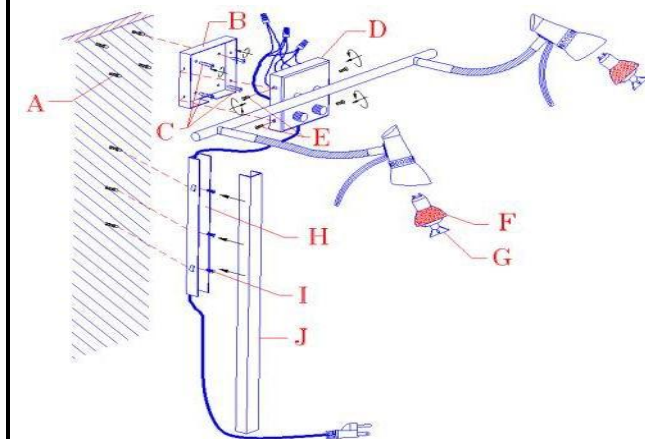

IMPORTANT SAFETY INSTRUCTIONS

Lighted lamp is HOT! Turn off the fixture and allow to cool for 10 minutes prior to touching the bulb.

WARNING – TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, EXPOSURE TO EXCESSIVE UV RADIATION, OR INJURY TO PRESONS:

WARNING: In handling of halogen bulb, care should be taken not to touch it with your bare hands. Oil residue will shorten the life of the halogen bulb. If you accidentally come in contact, wipe thoroughly with a clean, lint-free, cotton cloth. Allow the bulb to cool for 10 minutes before changing the bulb.

1. Turn off/unplug and allow to cool before replacing the bulb.
2. Bulb gets HOT quickly! Only contact switch/plug when turning on.
3. Do not touch hot lens, guard, or enclosure.
4. Do not remain in light if skin feels warm.
5. Do not look directly at lighted lamp.
6. Keep lamp away from materials that may burn.
7. Use only with a 50 watt or smaller bulb.
8. Do not touch the bulb at any time. Use a soft cloth. Oil from skin may damage the bulb.
9. Do not operate the portable luminaries with a missing or damaged guard, lamp containment barrier, or UV filter.

SAVE THESE INSTRUCTIONS

INSTALLATION INSTRUCTIONS

For Model P4440-084 / P4440-37B (Fixture Unit)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE, HARDWARE VERSION (Fig. 2 & Fig. 3)

1. Shut off power at the circuit breaker and remove old fixture from wall, including the mounting hardware.
2. Remove the cord and plug by disconnecting the wire nuts to the cord. **(NOTE: CAN NOT REINSTALL AS A PLUG IN ONCE THE CORD AND PLUG HAVE BEEN CUT OFF)**
3. Secure the mounting bracket (A) to the outlet box using the screws (B). The side of the mounting bracket marked "GND" must face out **(Fig.3)**.

CONNECTING THE WIRES (Fig. 5)

5. Connect the electrical wires as shown in Fig. 5, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting bracket by using the green screw provided.

COMLETING THE INSTALLATION (Fig. 4)

6. Place fixture body (C) over the mounting bracket (A) and with four screws (D).
7. Insert the brushing into the hole on the bottom of the fixture body (C)
8. Use suction cup (F) to install the bulb (E) (Bayonet Halogen GU10 Included) **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

