

INSTALLATION INSTRUCTIONS

05/10/2012

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove old fixture including the mounting hardware.
3. Attach the Circular Strap (A) to the Outlet box using Junction Box Screws (B) from the outlet box. The side of the Circular Strap marked "GND" must face out.
4. Determine length desired and thread Bars (G) to Canopy (E) and Fixture Body (J).
5. Adjust Cable (H) according to the desired distance from ceiling to hang Fixture, push the button at the outside face of the Canopy (E) for each cable to extend Cable (H) at Location (I) pulling the Cable (H) without pushing the button can restrict the Cable (H). Tightly secure each Cable (H) with strain Relief bushing (D) by loosening both screws from strain Relief Bushing (D) adjust to desired length. Then secure Knurled Knobs (I) to Fixture Body (J), making sure Cables (H) are leveled and then secure the Bushing Screws. (If it is necessary cut some Cable to shorten)
6. Thread two Studs (C) about 1/4" into the pre-drilled holes in the Circular Strap (A) spaced the same distance apart as the holes in the canopy.

CONNECTING THE WIRE (Fig. 2)

7. At this point, connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Circular Strap using the Green Screw provided.
8. Tuck the wire connections neatly into the ceiling junction box and then raise the Canopy (E) all the way to the ceiling. Thread Studs (C) into canopy, and secure with Knurled Knobs (F).
9. Install the light bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


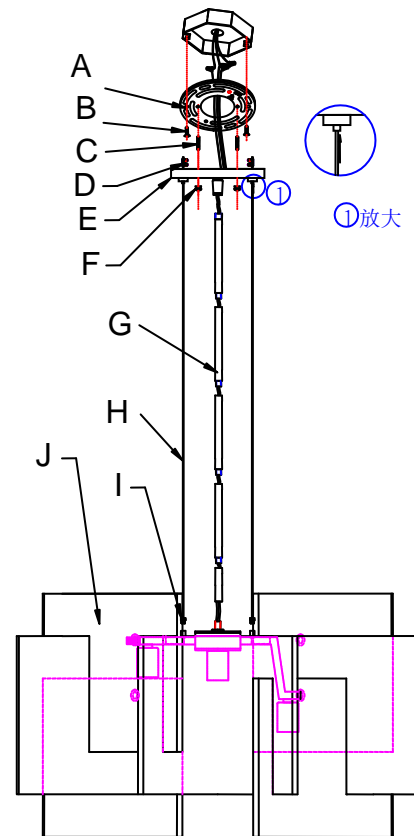


Fig. 2

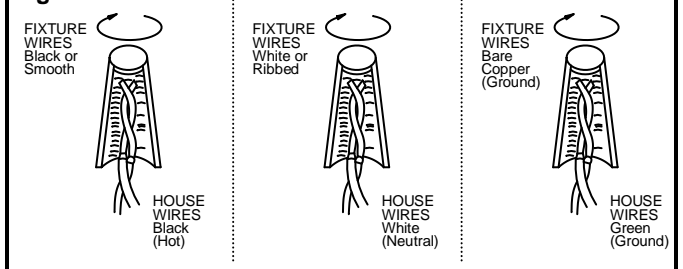

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

LA-1039E