

# INSTALLATION INSTRUCTIONS

Item#P1451 (New. 05/10/2012)

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## MOUNTING THE BACKPLATE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the Circular Strap (A) to the outlet box in the ceiling with two Screws (C). The side of the Circular Strap with "GND" marked on it and two convex points must face out.
4. Determine desired distance from ceiling to hang the fixture, and if necessary, cut cord to length plus five inches.
5. Loosen the Screw (F) and pushing the cord through the Strain Relief Bushing (E) and the center of both parts until about 5" of cord is exposed. Tighten Screw (F). (You may need someone to hold the fixture while installing the Strain Relief Bushing.) The fixture can now hang from the Strain Relief Bushing.
6. Carefully cut and remove approximately 4" of the outer sheathing from cord and strip 1/2" of the wire ends bare to expose the copper strands.

## CONNECTING THE WIRES (Fig. 2)

7. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixtures Ground Wire to it. Otherwise, connect the fixture Ground Wire directly to the Circular Strap using the Green Screw provided.
8. After wires are connected, tuck them carefully into the ceiling junction box, then place Canopy (D) over the Circular Strap (A) and secure it against ceiling with Screws (B).

## COMPLETING THE INSTALLATION (Fig. 1)

9. Place Glass Shade (H) and Metal Washer (I) over Socket (G), secure with Screw Shell (J).
10. Install 1\*40W G9 Xenon bulbs (G) (included) in accordance with fixture specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!). (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased**

**IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.**

Fig. 1

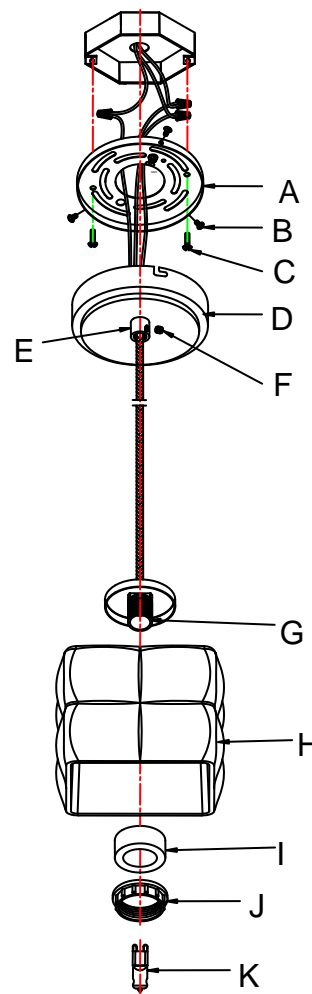


Fig. 2

