


SST3660™

60" x 36" x 72" | 1524 x 914 x 1829 mm

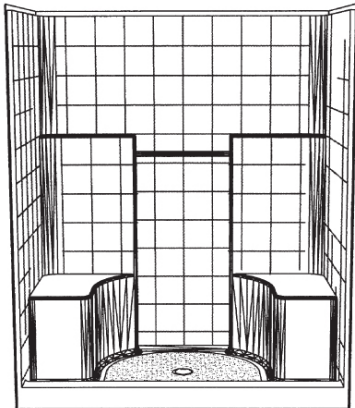

STANDARD FEATURE(S)

Built-in shelves
Towel bar
Tiled pattern finish
Two built-in seats

PLUMBER FEATURE(S)

One-piece installation

Codes/Standards Applicable

- ANSI Z124.1.2
- CSA B45 Series

Colors

Standard Fiberglass Colors

White 002

Bone
(Natural) 004

Non-Standard Fiberglass Colors

Almond 013

Sterling
Silver (Gray)
006

Black 015

Ice Gray 017

Sea Foam
Green 034

Peach
Bisque
043

Fawn Beige
054

Innocent
Blush 066

Colors shown are for reference purposes only and are subject to change without notice. Exact matches are not possible with your monitor display or printing method used.

Here are the electrical specifications for all MAAX Professional shower therapeutic systems offered in the United States.

PLEASE NOTE THAT SOME SYSTEMS MAY NOT BE AVAILABLE ON THE PRODUCT YOU HAVE SELECTED.

Please refer to the *Common Options* and *Massage System(s)* sections for more details.

STEAMAX	
Requires a dedicated 240 Volt, 1 phase circuit.	
All acrylic showers	5kW / 240V / 21A
Nuevo™ Shower	6kW / 240V / 25A

Installation Note

Install this product according to the *Installation Guide*.
All electrical wiring must be done per national/local electrical codes.