


INSTALLATION INSTRUCTION FOR FIXTURE 3132

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


ASSEMBLING THE FIXTURE (FIG.2)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread one end of the nipple (J) tightly into the coupling (K).
4. Insert the bracket (M) over the other end of the nipple (J), then secure tightly with the fixture loop (A).
5. Connect one end of the crystal chain (F) to the hole (C), and the other end to the small ring (L);
6. Insert the candle cover (H) over the socket (I), then place the fabric shade (G) over the candle cover (H).
7. Install the light bulb in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).** Hook the crystal drop (E) to the small ring (B), (D).

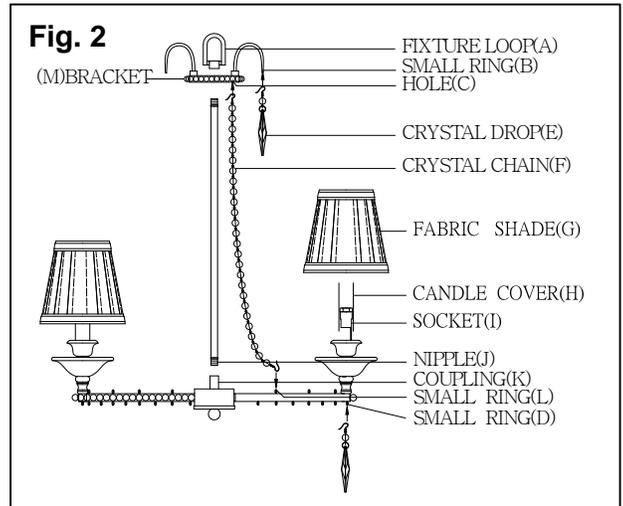

MOUNTING THE FIXTURE (FIG.1)

1. Thread the nipple (Q) into the collar loop (R) until snug.
2. Thread the other end of nipple (Q) tightly into the cross bar (N).
3. Place lock washer (O) over the end of nipple (Q) protruding through cross bar (N) and thread hex nut (P) onto nipple (Q) until tight.
4. Take this crossbar assembly and mount to ceiling outlet box (T) using outlet box screws (U) tightly. The side of cross bar marked with "GND" must face out.
5. Use proper chain pliers to open one end link of the chain and connect to the fixture loop (A). Close the link.
6. By measuring, determine the correct number of links needed for proper hanging height. Using pliers, disconnect and discard the remaining chain.
7. Carefully lace the fixture wires through the chain (V).
8. Slip collar ring (W) over the chain (V), then do the same with canopy (S).
9. Open the other end link of the chain (V) and connect to the collar loop (R). Close the link.
10. Feed the fixture wires through the collar loop (R) and nipple (Q) and pull until tight.

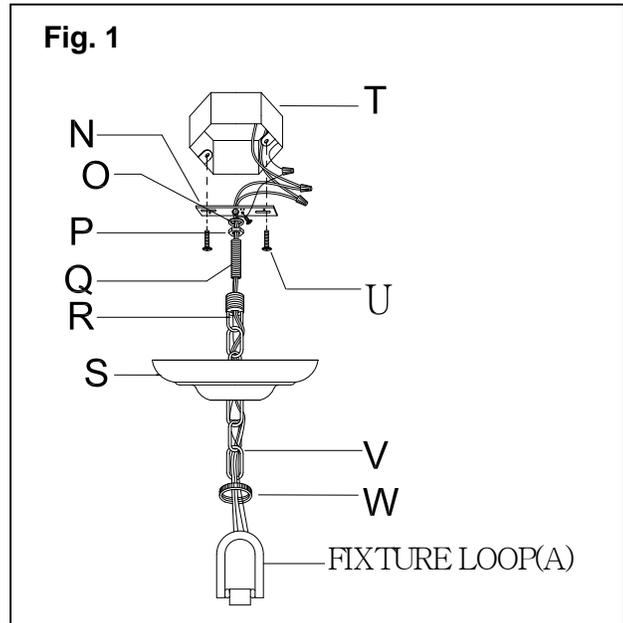

CONNECTING THE WIRE (See fig.3)

1. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After wires are connected, tuck them carefully inside the junction box.
2. Then raise the collar ring (W) and thread onto collar loop (R) protruding through canopy.

Your installation is now complete. Return power to the junction box and test the fixture.



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.