

INSTALLATION INSTRUCTIONS

For Model 979-1 (06/27/2012)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 2)

- 1 Shut off power at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the crossbar.
- 2 Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- 3 Place the Screw (R) over the Arm (T) secure with the Top Housing (S) and Metal Frame (U).
- 4 Secure Fixture Loop (I) to the Nipple (Q) on the top of the fixture, then secure the tube (J) with light cluster to the nut on the bottom of fixture.
- 5 Install the light bulbs (bulbs not include) according to the fixture specifications. **Note: DO NOT EXCEED THE SPECIFIED WATTAGE! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
- 6 Thread the glass shade (K) over the end of nipple and secure with metal washer (L), hex nut (M), bottom cap (N) and finial (O) until snug, then adjust the nut (P) to keep glass shade balance.

HANGING THE FIXTURE (Fig.1)

- 7 Thread nipple (E) into loop (H) until snug.
- 8 Thread other end of nipple (E) with loop (H) attached into crossbar (C) until snug.
- 9 Place lock washer (B) over end of nipple (E) protruding through crossbar (C) and thread hex nut (A) onto nipple (E) until tight.
- 10 Take this crossbar assembly and mount to ceiling outlet box with outlet box screws (D). Tighten screws securely with screwdriver and the side of the crossbar (C) marked "GND" must face out.
- 11 By measuring, determine the correct number of chain links needed for proper hanging height. Using proper chain pliers open one link, disconnect and discard excess chain.
- 12 Use the open line of chain and connect the chain to use fixture loop (I). Close the link and lace wire through the chain.
- 13 Slip loop collar (G) over the chain, then do the same with the canopy (F).
- 14 Open the other end link of chain and hang the fixture on the loop (H). Close the link with the proper chain pliers.
- 15 Feed the fixture wires through the loop (H), loop collar (G), canopy (F) and nipple (E) and pull until taut.

CONNECT THE WIRES (Fig.3):

- 16 At this point, connect the electrical wires as shown in (Fig.3) making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Other wise connect fixture's ground wire directly to the green screw on the cross bar.
- 17 Tuck these wire connections neatly into the ceiling junction box and then raise the canopy all the way to the ceiling. Raise the lock collar and thread onto ceiling loop protruding through canopy (Fig.2).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1

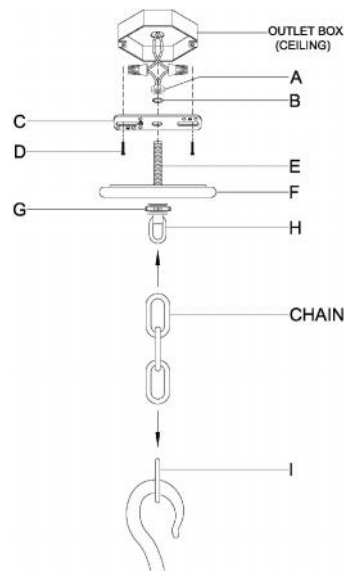


Fig.2


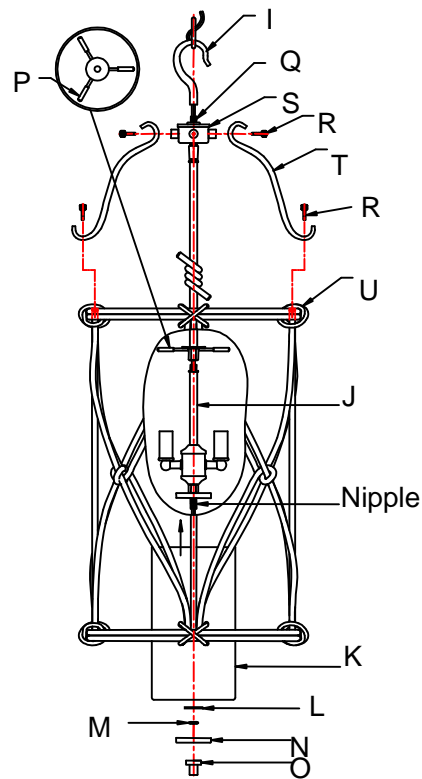


Fig.3



LA-1915E

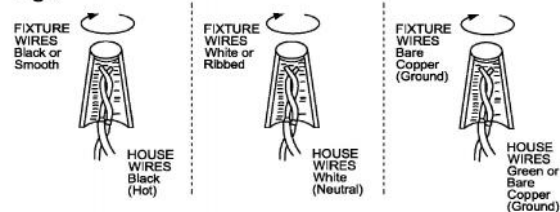

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



american
lighting
association