

FAUCET DESCRIPTION

- Chrome plated metal construction
- 3/8" male compression fittings
- Vandal resistant torx head screws

OPERATION

- Lever style handles with hot and cold color indicators
- Hot side clockwise (1/4) turn to open (counterclockwise to close)
- Cold side counterclockwise (1/4) turn to open (clockwise to close)

FLOW

- 2.2 gpm (8.3 L/min) max. aerator

CARTRIDGE


- Brass shell, ceramic disc construction

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B-125.1, NSF 61/9 and all applicable specifications referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

WARRANTY

- Warranted for 5 years against material or manufacturing defects

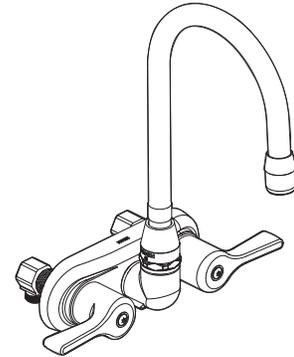


Two-Handle Wall-Mount Bar Faucet

Model: 8281



NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 2 HOLES, 1" MIN. DIA. AND 4" ON CENTER

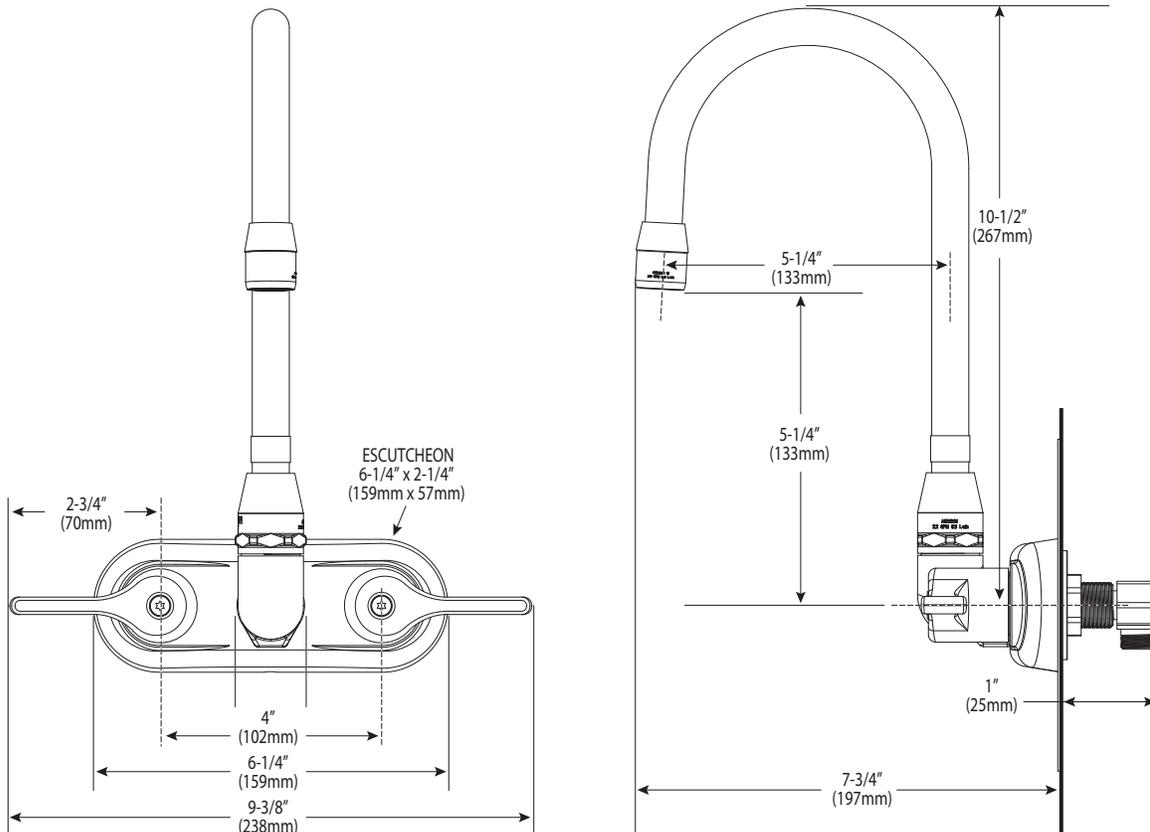

CRITICAL DIMENSIONS

(DO NOT SCALE)