




Buy it for looks. Buy it for life.®

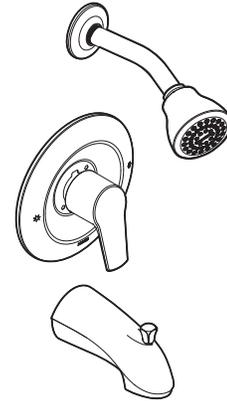

**FAUCET DESCRIPTION**

- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter spout

**OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3.6° F (± 2° C)

**FLOW**

- Showerhead limited to 2.5 gpm max. (9.5 L/min)

**CARTRIDGE**

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

**STANDARDS**

- Third party certified to meet CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein
- **ADA** for lever handle

**WARRANTY**


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

**METHOD™ POSI-TEMP®**

**Single-Handle Tub/Shower (Trim Only)**

- Models:** T2801 series - valve trim only  
 T62801 (Bulk pack 12 per carton)  
 T2802 series - shower trim only  
 T62802 (Bulk pack 12 per carton)  
 T2803 series - tub/shower trim  
 T62803 (Bulk pack 12 per carton)  
 T62808 (Bulk pack less Showerhead)

**Valves:** 62300 series  
 2500 series

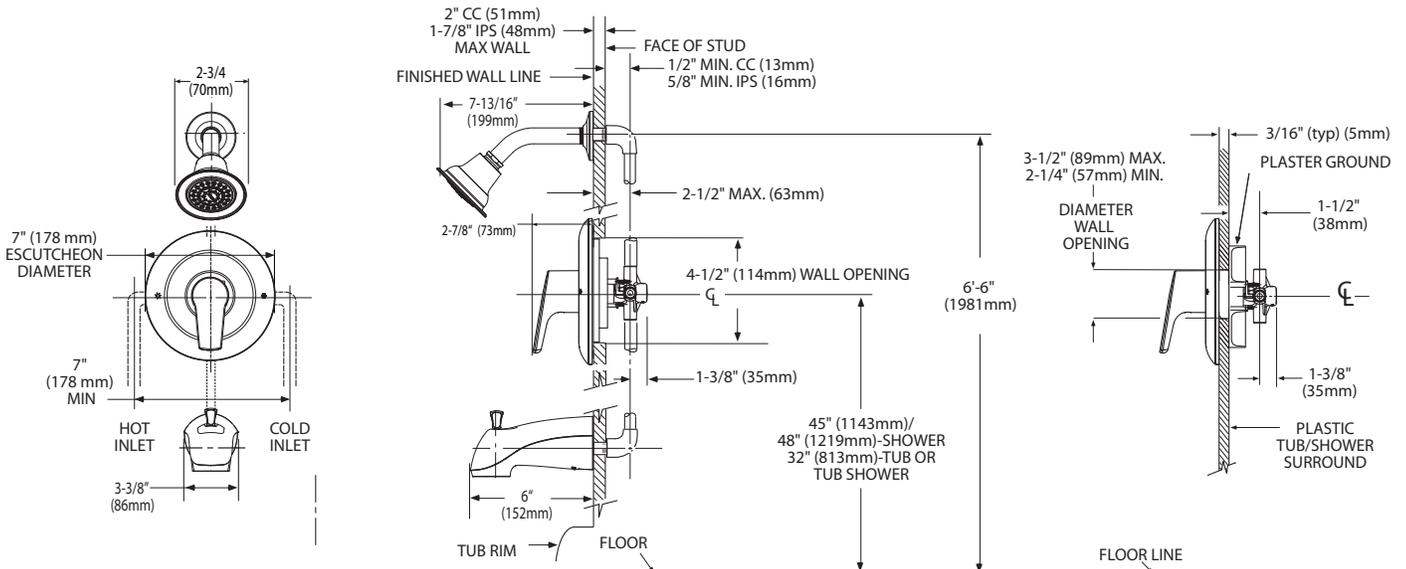

**THICK WALL APPLICATION**

**THIN WALL APPLICATION**

**CRITICAL DIMENSIONS**

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

[www.moen.com](http://www.moen.com)