

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Single function hand shower

OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close.
- Rotate cold side handle clockwise to open and counterclockwise to close

FLOW


- Hand shower meets 2.5 gpm max. (9.5 L/min)

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE 1014
- ADA  for lever handles


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

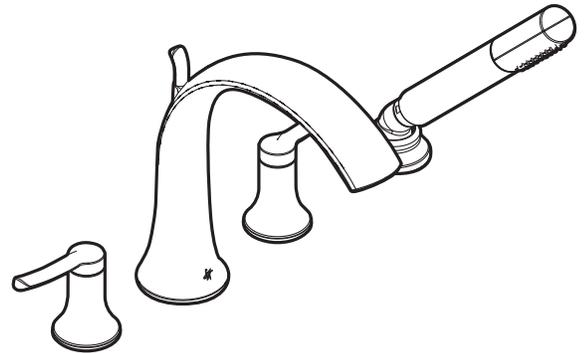

Fina™
Two-Handle Roman Tub Faucet Trim
with Integral Diverter

Models: TS21704 Series
Valves: S924, S9204

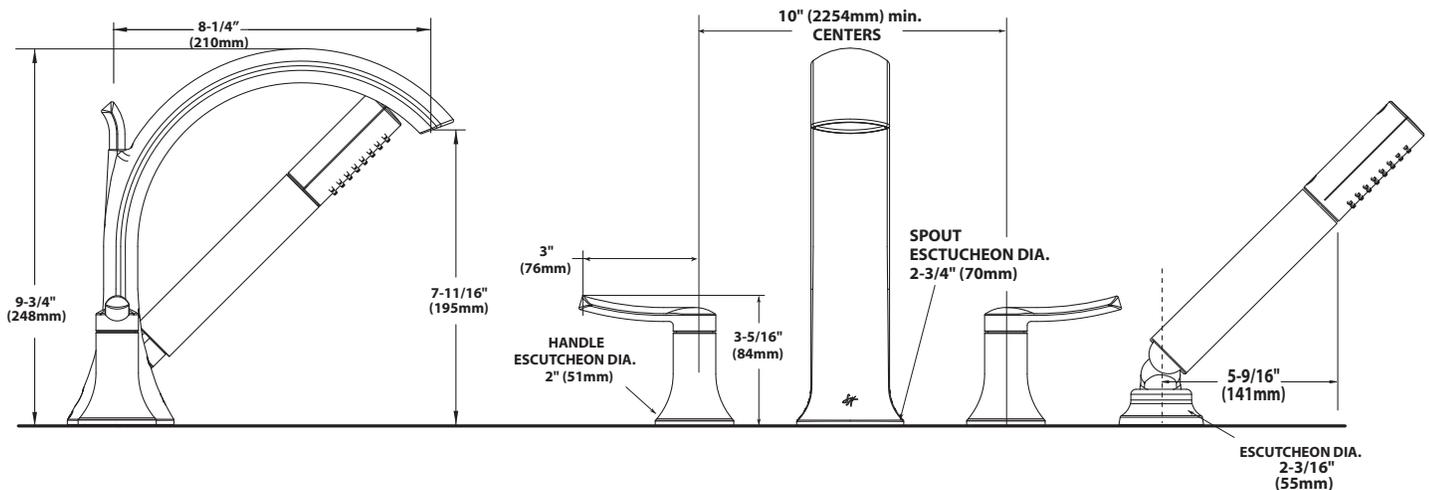

NOTE: THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS



CRITICAL DIMENSIONS
(DO NOT SCALE)