

**DESCRIPTION**

- Metal construction with chrome plated, LifeShine® brushed nickel, or LifeShine® hammered nickel finishes
- For installations from 8" (203mm) to 16" (406mm) centers
- Designed to be installed on decks up to 2-1/8" (54mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing
- Three function hand shower
- For use with S924 valve

**OPERATION**

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close.
- Rotate cold side handle clockwise to open and counterclockwise to close

**FLOW**

- Spout designed to deliver 18 gpm max. at 40 psi (68 L/min)
- Hand shower meets 2.5 gpm max. (9.5 L/min)

**CARTRIDGE**

- 1248 cartridge design
- Non-metallic and stainless steel materials

**STANDARDS**


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE 1014

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




Lever  
Handles

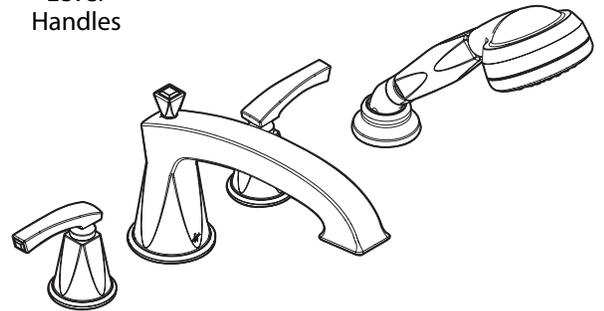

**Divine™  
Two-Handle Roman Tub Faucet Trim  
with Integral Diverter**

**Models:** TS254, TS254BN, TS254HN

**Valve:** S924

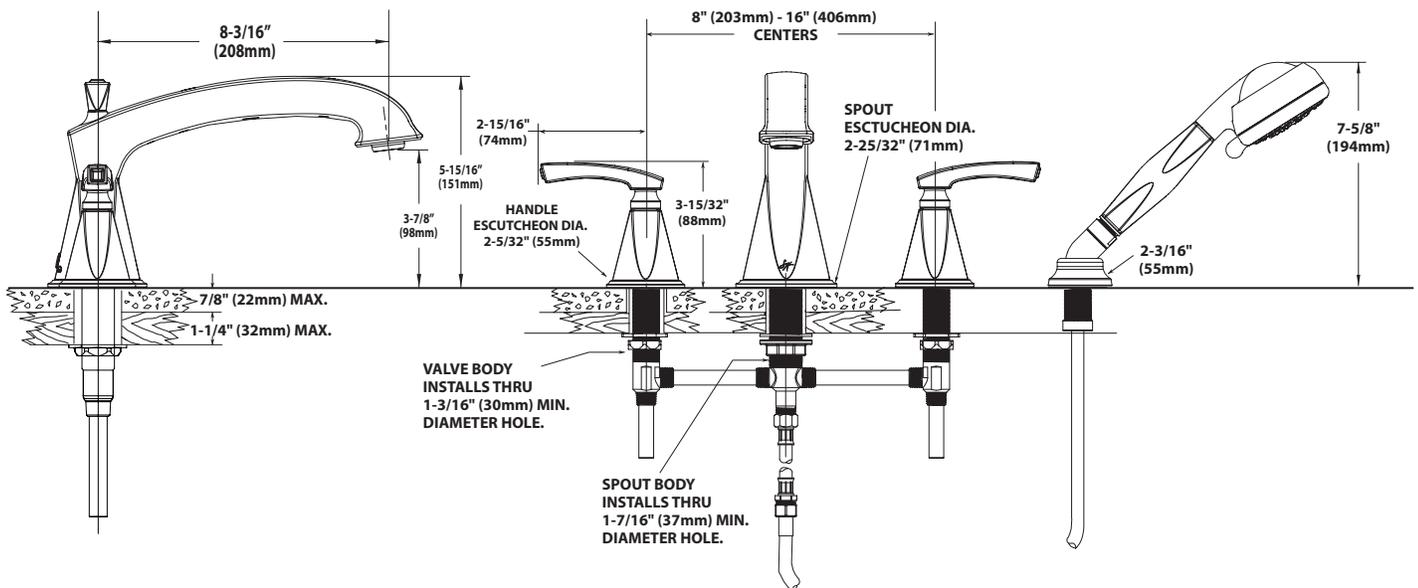

**NOTE:** THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS



**CRITICAL DIMENSIONS**  
(DO NOT SCALE)