

**DESCRIPTION**

- Metal construction with chrome plated or LifeShine® brushed nickel, or oil rubbed bronze finish
- Includes 7" rainfall showerhead, arm and flange
- For use with S932 1/2" CC valve
- Includes diverter tub spout

**OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°F

**FLOW**

- Showerhead is limited to 2.5 gpm max. (9.5 L/min)

**CARTRIDGE**


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

**STANDARDS**

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1, ASSE 1016, and all applicable requirements referenced therein


**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

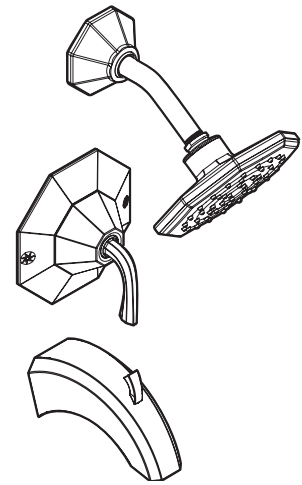

**FELICITY™**  
**Single-Handle Posi-Temp®**  
**Tub/Shower Trim**

**Models: TS344, TS344BN, TS344ORB**

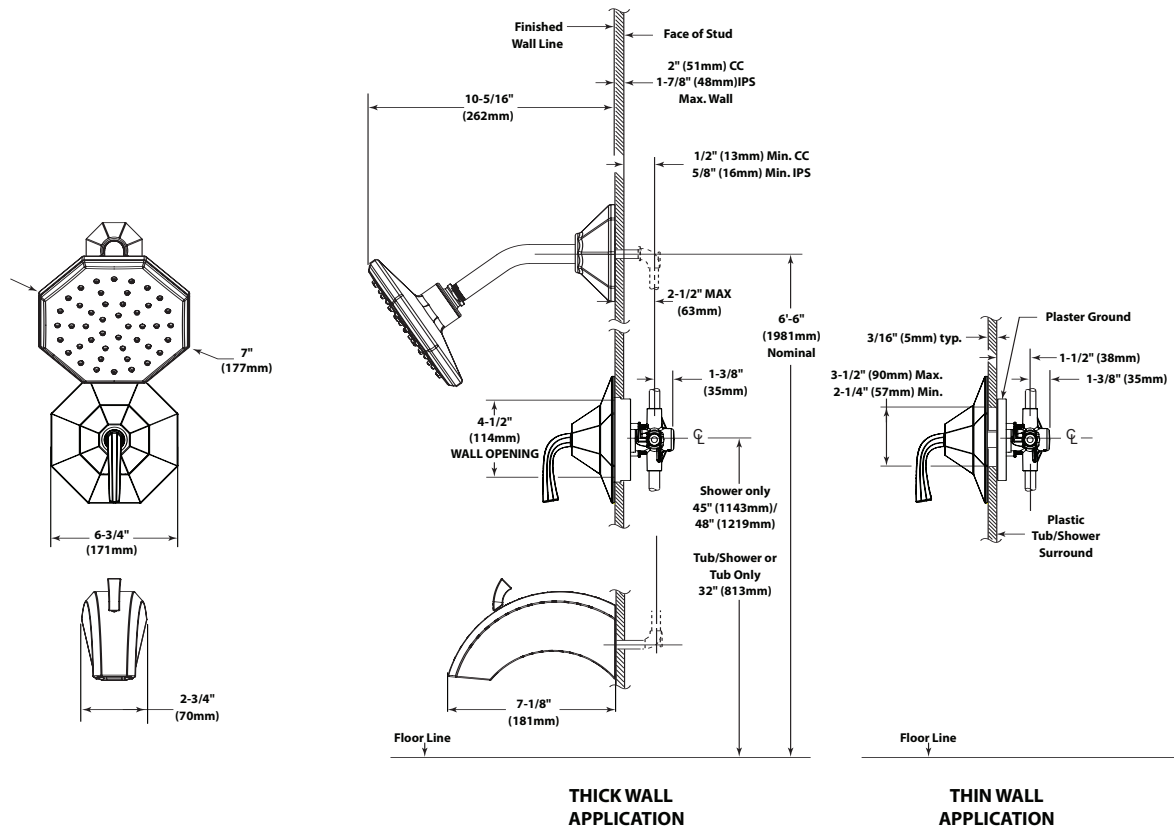

**CRITICAL DIMENSIONS**

(DO NOT SCALE)