PORCHER®

EPOQUE™ NOUVEAU HIGH BACK BATHING POOL

CAST IRON

EPOQUE™ HIGH BACK BATHING POOL, 60490

- Formed of cast iron construction
- Claw foot legs with levelers
- Customizable tub and feet exterior with enamel based paint
- 45 gallon capacity
- Designed for floor or wall mount tub fillers only

Kit Components:

- ☐ 60290 Tub Only
- □ 85081 Tub Legs (4)

Nominal Dimensions:

66-7/8" x 30-3/4" x 32-1/4" (1700 x 780 x 820mm)

2" Drain 2-1/2" Overflow Hole

Compliance Certifications – Meets or Exceeds the Following Specifications:

• ASME A112.19.1M-1994



To Be Specified (Optional):


- □ Exposed lever activated drain (Metal Plated Exposed Pipe)
 - ☐ (Chrome): 85050-00.002; or
 - ☐ (Polished Brass): 85050-00.099; or
 - ☐ (Brushed Nickel): 85025-00.295; or
 - ☐ (Polished Nickel): 85028-00.008


ROUGH IN DIAGRAM AND PRODUCT SPECIFICATIONS SHOWN ON REVERSE SIDE

PORCHER®

EPOQUE™ NOUVEAU HIGH BACK BATHING POOL

CAST IRON

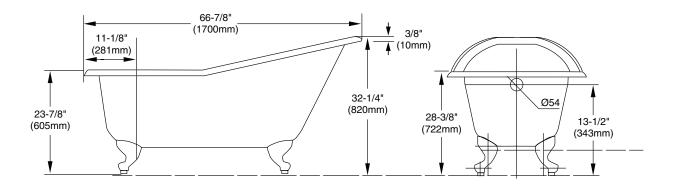

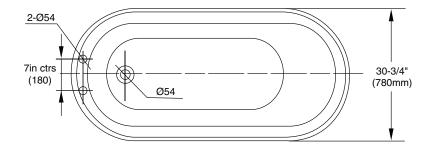

GENERAL SPECIFICATIONS FOR 60490 BATHING POOL	
INSTALLED SIZE66-7/8" :	x 30-3/4" x 32-1/4" (1698 x 781 x 819mm)
WEIGHT	369 Lbs. (167 Kg)
WEIGHT W/WATER	742 Lbs. (336 Kg)
GALLONS TO OVERFLOW	45 Gal. (170 L)
BATHING WELL AT SUMP	23-3/4" x 49" (602 x 1245mm)
BATHING WELL AT RIM	27-3/4" x 60-5/8" (706 x 1540mm)
WATER DEPTH TO OVERFLOW _	12-1/2" (311 mm)
FLOOR LOADING (PROJ. AREA)_	72 Lbs./Sq. Ft. (345 Kgs/Sq. m)

NOTES

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIALS BY OTHERS.

- IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.
- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.1M–1994. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.