


Type \_\_\_\_\_  
 -60 -68  
 P5694

Catalog No.	Diffuser		Lamping	Dimensions (Inches)		
	White Ribbed	Clear Prismatic		A	B	C
P5694	-60	-68	1-9w CF	8-1/4	5-3/4	4-3/8

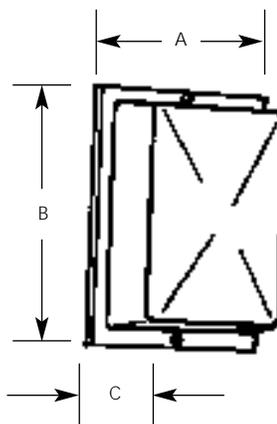

**Specifications:**

General

- White steel back plate
- UV stabilized polycarbonate diffuser (see "options" below)
- Diffuser completely covers back plate - flush to ceiling or wall
- Diffuser held in place with stainless steel tamper proof screws
- Tamper proof driver provided with fixture

Mounting

- Ceiling or wall mounted
- Covers any outlet box
- Mounting strap for outlet box provided for center lock up mounting

Options

- White Ribbed diffuser - specify suffix "60"
- Clear Prismatic diffuser - specify suffix "68"

Electrical

- G23 base sockets
- 120V HPF ballasts
- Minimum start temperature + 32°F

Labeling

- UL-CUL wet location listed