




Compact Fluorescent

**6" Step Baffle**  
**Single Lamp**  
**IC & Non-IC**

**Recessed**

Type \_\_\_\_\_  
 -28  
 P8082

Catalog No.	Finish	Lamping	Dimensions (Inches)	
	White		A	B
P8082	-28	See Below	8-3/4	6

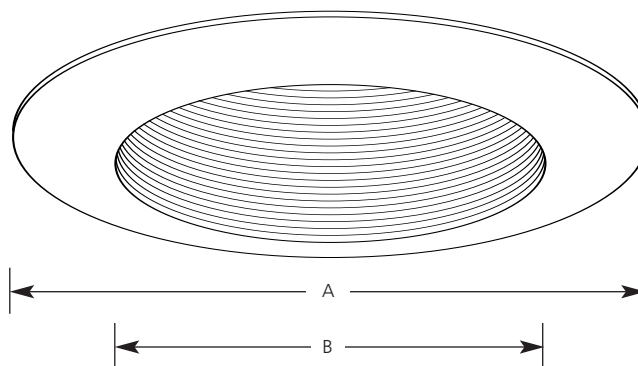

Housing	Lamp Wattage	
	IC	Non-IC
P83-26ICAT	26w 4-pin Triple-tube CF	26w 4-pin Triple-tube CF

**Specifications:**

Flange

- White powder coated metal
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- One piece aluminum construction
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Multigrove white baffle

Lamps

- Maximum overall length of lamp must not exceed 5.9" (5-15/16)
- Available lamps are: GE F26TBX, Phillips PLT26, Sylvania CF26DT or Progress 7808-01

Labeling


- UL-CUL damp location listed

Progress Lighting  
 Post Office Box 5704  
 Spartanburg, South Carolina  
 29304-5704

www.progresslighting.com

Type \_\_\_\_\_  
 -28 -31  
 P8082

Catalog No.	Finish		Dimensions (Inches)	
	White	Black	A	B
P8082	-28	-31	8-3/4	6

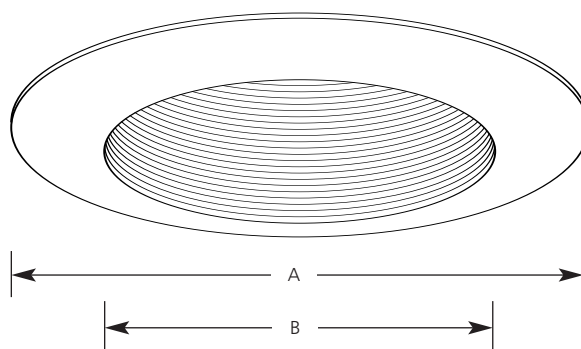

Lamp Wattage	IC	Non-IC
<b>Housing</b>		
P87-AT, ATQC	90BR40/PAR38	150BR40/PAR38
P187-TG	90BR40/PAR38	150BR40/PAR38
P821-AT	150BR40/PAR38	150BR40/PAR38
P821-FB,FBFC	N/A	150R40/BR40/PAR38/40A19

**Specifications:**

Flange

- Bright white powder painted metal flange
- No light leaks around trim flange
- Covers irregular ceiling opening

Trim

- One-piece aluminum construction
- Designed for use with 90w BR40 or 150 BR40 and PAR38 lamps
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Multi-groove baffle

Options

- White baffle - specify "28" after catalog number
- Black baffle - specify "31" after catalog number

Labels

- UL-CUL damp location listed

Photometrics

- Refer to PAR38 & BR40 Lamp Application Data