


Type \_\_\_\_\_

-30

P7006

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7006	-30	F15T12	18	1-3/4	5-1/4

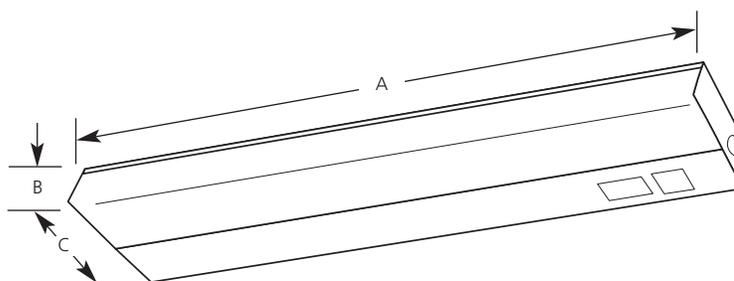

**Specifications:**

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser: 17-15/16" L x 2-5/8" W x 1-9/32" D
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Electrical

- Standard 120V NPF ballast
- K.O. for rocker switch (P8603-01 accessory) and G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- Flush mounted under cabinets and shelves, over a desk, in kitchen or work area
- End KO's for for continuous row mounting