


Type	-20	-28	-31	-82
P6006	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P6007	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P6008	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
P6009	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish					Dimensions (Inches)		
	Antique Bronze	White	Black	Metallic Gray		A	B	C
P6006	-20	-28	-31	-82	Surface Mount	7-7/8	7-3/8	
P6007	-20	-28	-31	-82	Wall Mount	7-7/8	7-3/8	10-3/4
P6008	-20	-28	-31	-82	Pendant	7-7/8	7-3/8	
P6009	-20	-28	-31	-82	Cord	7-7/8	7-3/8	

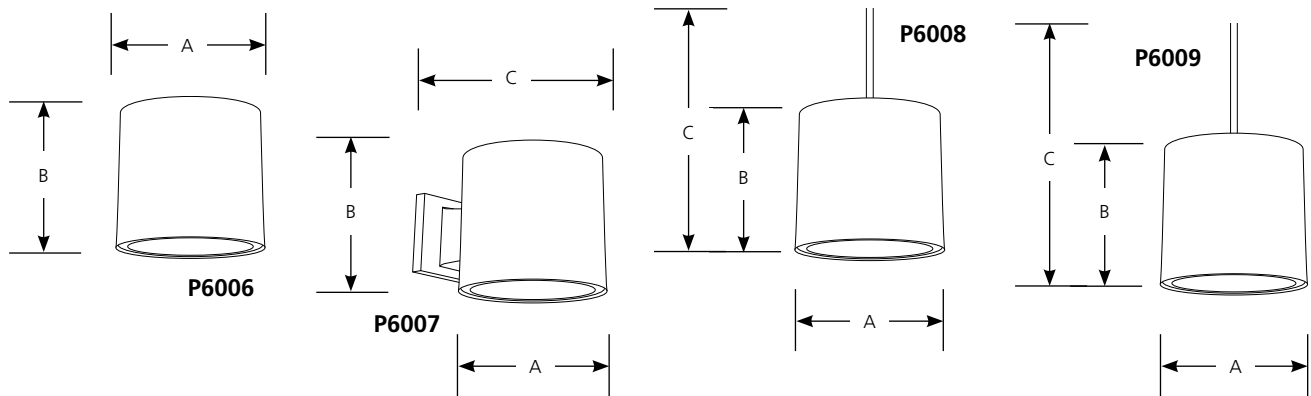

The P6000 Series LED cylinders are nominal 6" cylinders designed to be used with the P8071 series trims. Available in surface, wall, pendant, or cord mount, they provide a cost effective option for LED surface lighting. It is suitable for a wide variety of commercial, retail and institutional applications.

**Specifications:**

General

- Powder coat all finishes
- Spun aluminum housing
- 0.5" wall thickness
- For use with P8071 (sold separately)
- One 12" stem included
- Companion Close-to-ceiling, Pendant, Wall lantern, fixtures are available

Mounting

- Covers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included
- Ceiling flush mount (P6006)
- Wall mount (P6007)

- Ceiling stem mount (P6008)
  - can hang straight up to a 52° ceiling
  - canopy furnished standard with a 1/2" x 15" pendant
  - stems can be field cut and are available in custom lengths in 1/2" increments
- Ceiling cord mount (P6009)
  - 8' cord standard
  - other lengths available in black or white cord only

Electrical

- Pre-wired
- Quick Link connector

Labeling

- cCSAus Damp location listed when used with the P8071 (P6006, P6008, P6009)
- cCSAus Wet location listed when used with the P8071 (P6007)