



solid state

Hide-A-Lite III

Undercabinet

120V AC LED

ENERGY STAR® Qualified


Type _____

-30

P7510



Catalog No.	Finish	Light Source	Wattage	Dimmable	Dimensions (Inches)	
	White				A	B
P7510	-30	LED array (included)	4.4w	Yes	3-1/4	15/16

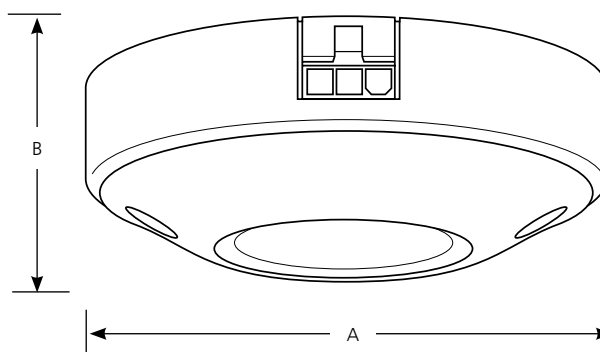

Specifications:

General

- Die-cast aluminum enclosure
- Diffuse polycarbonate lens:
- Painted White (-30) finish
- ENERGY STAR® qualified
- 5 year warranty

Mounting

- Easily mounts to undercabinet surface with (2) screws (provided)

Electrical

- No driver or transformer is needed
- Powered directly by 120V AC from a single location using P8740 Direct Wire J-Box
- Each unit has 3 connection points - two sides and on back for versatility
- Linkable using Hide-A-Lite (HAL3) linking cables/accessories (P8735, P8733, P8737, P8738, P8743)

Lamping

- Uses (12) long life AC LEDs
- 4.4w at 120VAC, 60Hz
- 274 lumen output, 62 lumens per watt
- CCT: 3000K
- 84 CRI
- TM-21 42000 hour life

Dimming

- Dimmable to 15% brightness, see list below for known compatible controls:
 - Lutron: LG-600PH-LA, S-600H, DV-600P, AY-600P, S-600P, FA-600P, Q-600P, DVELV-300P, VTELV-600, NTELV-300, NELV-450
 - Pass & Seymour: DCL453PTCCCV6
 - Leviton: AWRMG-MAW
 - We do not recommend using digital dimmer controls

Labeling

- cCSAus Damp location listed



...
**lighting
facts**
LED Product Partner

Progress Lighting
701 Millennium Blvd.
Greenville, South Carolina
29607

www.progresslighting.com

Rev. 08/13