



solid state


**Bingo**  
**Energy Star compliant**

**Close-To-Ceiling**

Type \_\_\_\_\_  
-0930K    -7430K

P3747       

Catalog No.	Finish		Light Source	Dimensions (Inches)		
	Brushed Nickel	Venetian Bronze		A	B	C
P3747	-0930K	-7430K	LED array (included)	23-3/4	3-3/8	24-1/8

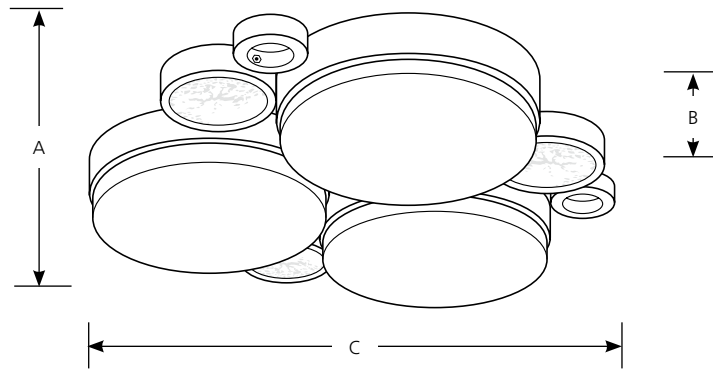

**Specifications:**

General

- White acrylic diffusers: 11" dia.
- Plated Brushed Nickel (-0930K), Venetian Bronze (-7430K) finishes
- Steel construction
- Complies with "Americans with Disabilities Act" - ADA
- Energy Star Certified
- LED Module is replaceable
- 5 year warranty warranty
- Matching fixtures P3695, P3737 and P3756

Mounting

- Wall or ceiling mount
- Ceiling pancovers a standard 4" hexagonal recessed outlet box
- Mounting strap for outlet box included

Electrical

- Pre-wired

Light Engine

- 17w / 0.15 amps at 120VAC, 60Hz
- Lumens: 1195
- 68.1 lumens per watt
- TM-21 42000 hour life
- CCT: 3000K
- 82 CRI
- Dimmable to 10% brightness, see list below for known compatible controls:
  - Lutron: LG-600PH-LA, S-600H, DV-600P, AY-600P, S-600P, FA-600P, Q-600P, DVELV-300P, VTELV-600, NTELV-300, NELV-450
  - Pass & Seymour: DCL453PTCCCV6
  - Leviton: AWRMG-MAW
  - We do not recommend using digital dimmer controls

Labeling

- cCSAus Damp location listed



Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com

Rev. 07/13