

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Designed to be installed through 2, 1-1/4" (32mm) min. dia. holes
- Hydrolock™ quick connect installation
- Includes optional hot and cold temperature indicator

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel


FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Water Drinking Act
- ADA  for lever handles


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

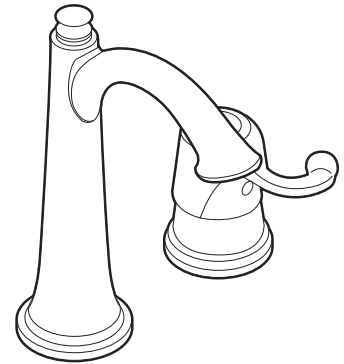

**Savvy™
Single-Handle Prep Bar Faucet**

Models: S691 series

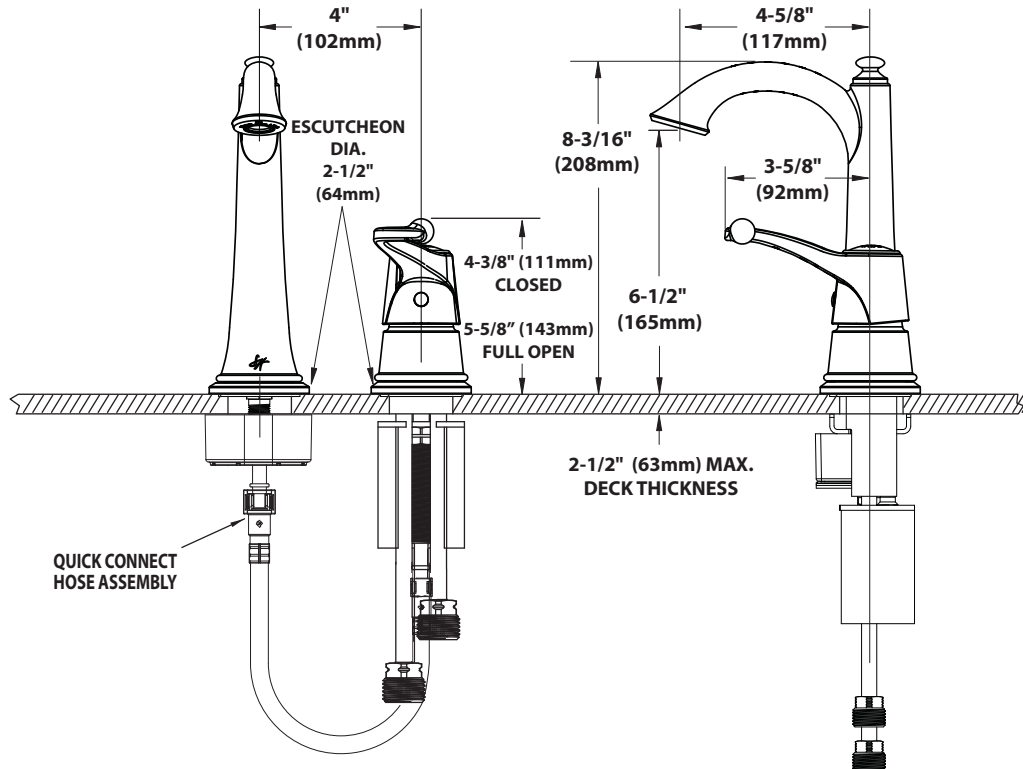

CRITICAL DIMENSIONS

(DO NOT SCALE)