

SPEAKMAN®

SE-690-PVC

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

The SE-690-PVC Safe-T-Zone® features an eye/face wash with dual spray outlets, flip top dust caps and round bowl combined on a PVC stanchion with an impeller action deluge showerhead that is activated by a stainless steel pull rod.

SPECIFICATIONS

Showerhead: 8" Cyclac® yellow plastic

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female 300 series stainless steel.

Full flow stay open ball valve.

Activator: 300 series stainless steel triangular pull rod

Stanchion: 1½" schedule 80 PVC

Inlet & Waste: 1½" NPT female

Performance: 20 gpm @ 30 psi

EYE/FACE WASH: SE-495

Bowl: Yellow plastic

Spray Heads: (2) yellow plastic spray outlets with flip-top dust caps

Valve: ½" NPT female 300 series steel.

Full flow stay-open ball valve


Activator: Stainless steel push handle

Inlet: ½" NPT female

Performance: 3.8 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

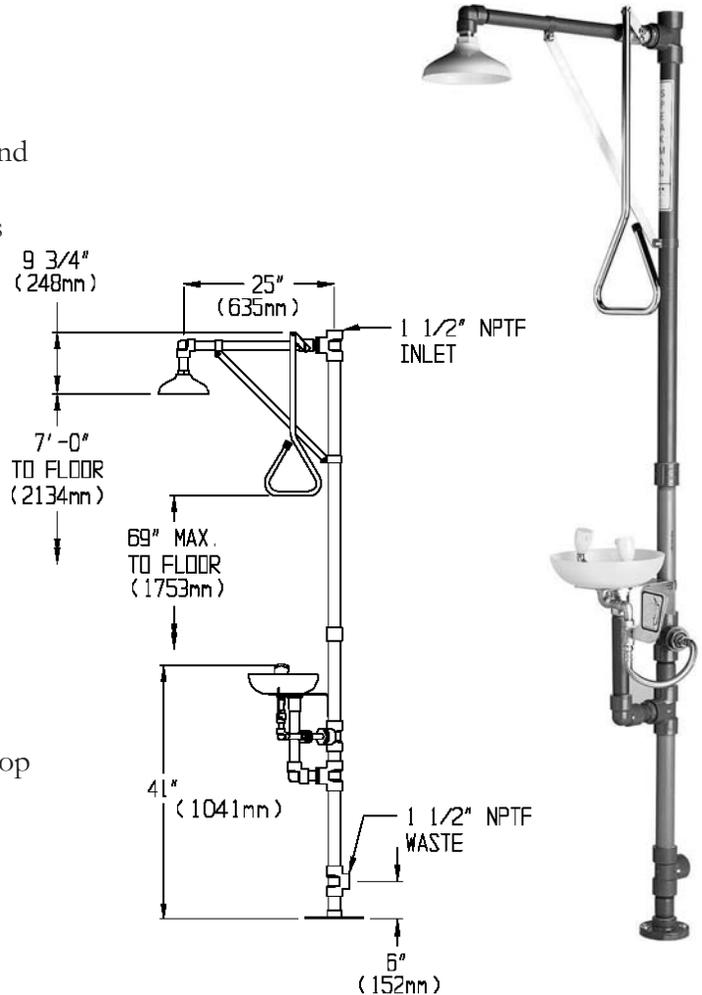

NOTE: PULL HANDLE SHOWN ROTATED 90°

OPTIONS

- HFO Hand foot operation
- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand held spray
- SSH Stainless steel showerhead
- BH Chrome plated brass showerhead

| |
|----------------------------|
| Job Name _____ |
| Location _____ |
| Architect/Engineer _____ |
| Sales Representative _____ |
| Wholesaler _____ |
| Date _____ Model # _____ |