

SPEAKMAN®

SEF-1822-TW

EYESAVER® FAUCET WITH SENSOR OPERATED FAUCET

DESCRIPTION

The SEF-1822-TW Eyesaver® faucet combines a sensor operated gooseneck faucet with an independently operated eyewash. The faucet is AC powered and features a below counter mixer to adjust temperature for the faucet. The eyewash offers twin aerated sprays and flip top dust covers and is supplied with either cold or tepid water through a separate feed. Tepid water to the eyewash is provided with the included SE-370 mixing valve.



SPECIFICATIONS

Operation: Eyewash and faucet operate independently of each other

Supply: 3/8" compression male connections for hot and cold inlets

Finish: Chrome plated brass

Eyewash Activation: Pull handle with graphics

Eyewash Sprays: Aerated sprays

Faucet Flow Rate: Autoflo® device controls flow to 2.2 GPM/ 8.3 LPM


Eyewash Flow Rate: 2.87 GPM at 30 psi. flowing.

Pressure: 30 psi. minimum flow pressure, 80 psi. maximum static pressure

Approvals: Meets ASME A112.18.1, ANSI Z358.1 and CSA B125-98

Vacuum Breaker (ST option): UPC and CSA. Meets ANSI/ASSE 1035, CSA B64.8,

Eyewash Thermostatic Mixing Valve: SE-370

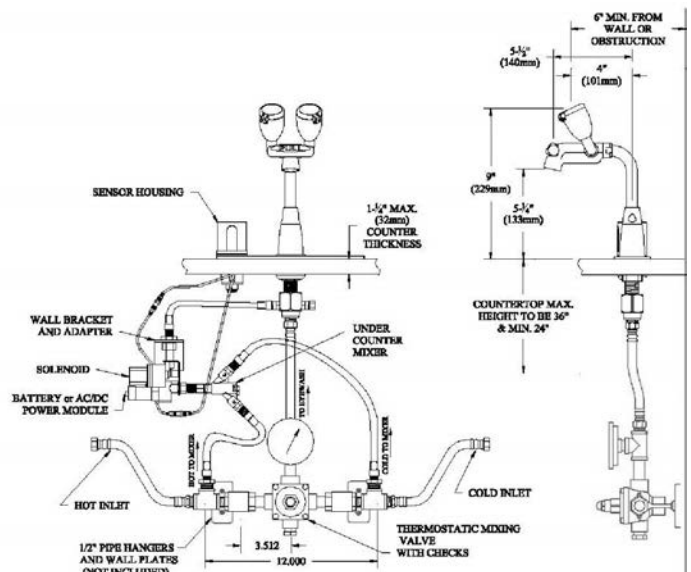

OPTIONS

- 8 8" gooseneck spout
- BO Vandal resistant 0.5 gpm flow control
- LF 2.2 gpm Laminar flow faucet outlet
- NA Non-aerated eyewash

Job Name _____	
Location _____	
Architect/Engineer _____	
Sales Representative _____	
Wholesaler _____	
Date _____	Model # _____