



**GENERAL PRODUCT INFORMATION:**




This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box.


This product is suitable for damp locations.

**CAUTION—RISK OF FIRE**

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **DISCONNECT POWER TO THE ELECTRICAL BOX.**

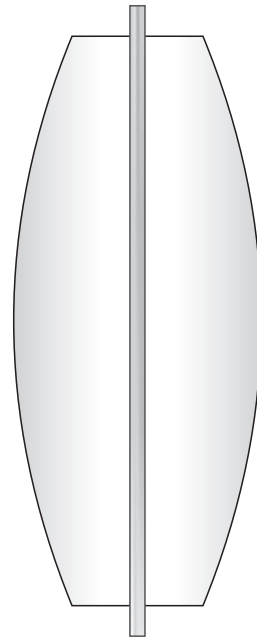


**Set the Fixture Hooks**

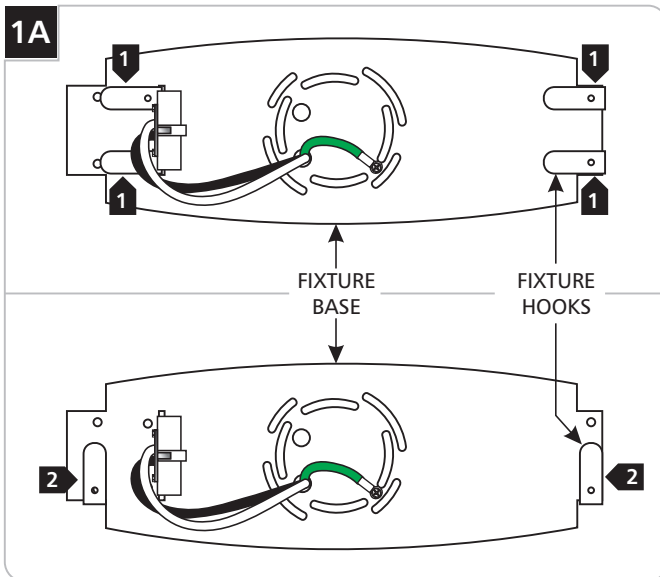


**NOTE:** For vertical mounting, skip these steps and continue to section 2A. For horizontal mounting, follow the steps below before continuing.

- 1** Remove all four fixture hooks by removing the screws on the back of the fixture base.
- 2** Reattach **only two** of the fixture hooks to the bottom outside holes on the fixture base.

**Install the Fixture Base**

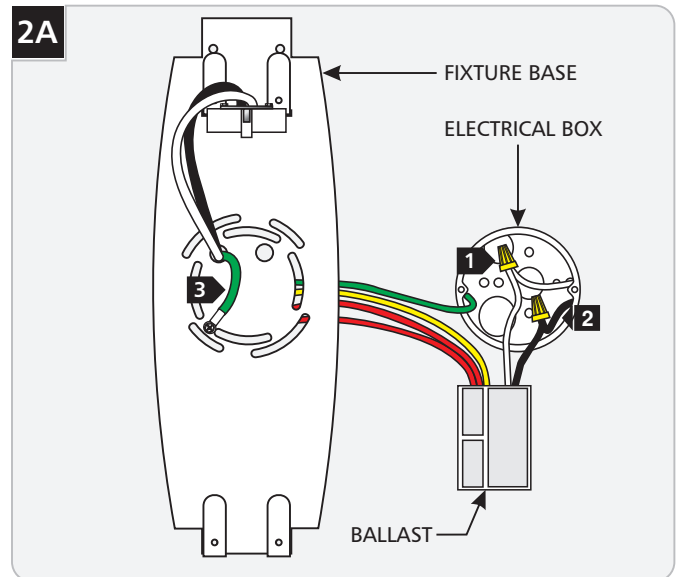

- 1** Connect the ballast white wire to the neutral power line wire with a wire nut.
- 2** Connect the ballast black wire to the hot power line wire with a wire nut.
- 3** Connect the green ground wire to a suitable ground according to local electrical codes.

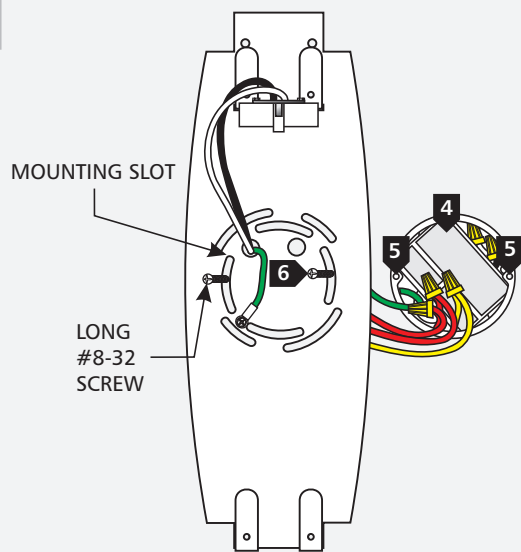**2B**


- 4** Place the ballast, all wires and wire nut connections inside the electrical box.
- 5** Line up two mounting slots with the two electrical box holes. Make sure the fixture hooks point upward.
- 6** Level the fixture base and secure it to the electrical box with the two Long #8-32 screws provided.

**SAVE THESE INSTRUCTIONS!**

**TECH LIGHTING®**  
 7400 Linder Ave, Skokie, IL 60077  
 847.410.4400  
[www.techlighting.com](http://www.techlighting.com)

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.  
 A Generation Brands Company

## Install the Lamp and Glass Shade

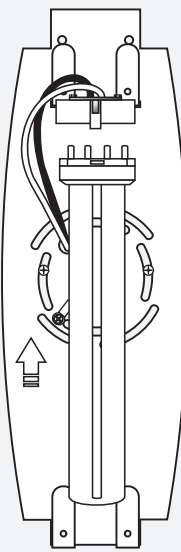**3A**


**CAUTION:** To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

**NOTE:** Use only your fingers to replace the lamp.

Use **MAX 13 Watt Twin-Tube Compact Fluorescent Lamp.**



- 1** Push the lamp completely into the socket.

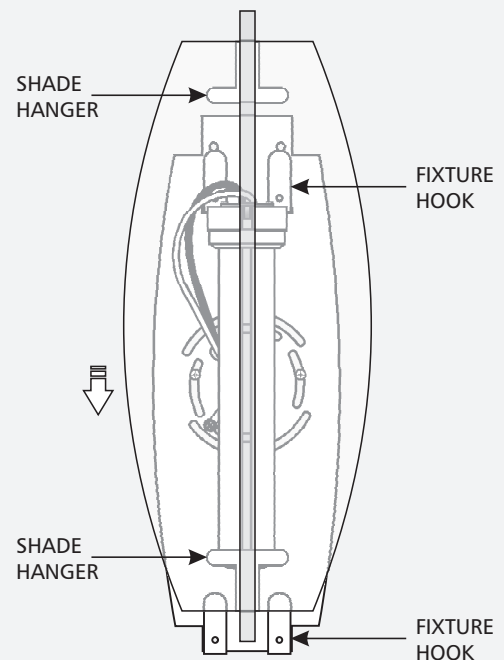**3B**

- 2** Slide the shade hangers onto the fixture hooks.