

# TOTO®


## CST454CEF(G) Drake® II Two-Piece Toilet, 1.28 GPF



CST454CEFG - Drake® II Two-Piece Toilet



Double Cyclone flushing system with maximum cleaning action for a cleaner toilet bowl.



Choose a SoftClose toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

- Sleek high profile two-piece design
- Double Cyclone® Flushing Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface
- Saves 20% water over 1.6 gpf toilets.

High profile two-piece toilet. High efficiency (1.28Gpf/4.8Lpf) Double Cyclone flushing action.

Tank cover, fittings, polished chrome trip lever included.

■ **CST454CEF**  
Elongated toilet.

■ **CST454CEFG**  
Elongated toilet. SanaGloss® glazing.

□ **C454CEF**  
Elongated front bowl only, 12" rough-in.

□ **C454CEFG**  
Elongated front bowl only, 12" rough-in. SanaGloss glazing.

□ **ST454E**  
Drake II tank and cover only. Complete with tank trim and coupling components.

□ **SS114**  
SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Trip Lever:  
Standard #CP Polished Chrome  
Optional See price book for additional finishes

 **ADA Compliant**  
For installation condition with approach from the left hand side.

# CST454CEF(G)

## Drake® II Two-Piece Toilet, 1.28 GPF

### ■ PERFORMANCE

The TOTO® Double Cyclone® flushing system offers outstanding commercial grade performance. The TOTO high-efficiency two-piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

### ■ SPECIFICATIONS

Water Use: 4.8 Lpf/1.28 Gpf  
 Flush System: Gravity Feed  
*(Double Cyclone® Technology)*  
 Min. Water Pressure: 8 psi (Static)  
 Water Surface: 7-1/8" x 9-1/4"  
 Trap Dia.: 2-1/8"  
 Rough-in: 12"  
 Trap Seal: 2-3/8"  
 Warranty: One Year Limited Warranty  
 Material: Vitreous China

Shipping Weight: **C454CEF(G)**  
 57.3 lbs.  
**ST454E**  
 31.5 lbs.

Shipping Dimensions:  
**C454CEF(G)**  
 29" L X 14-3/4" W X  
 11-1/2" H  
**ST454E**  
 18" L X 9" W X 16" H


*Meets all ASME A112.192.2, CSA B45 Requirements, and LASPS for rebate program.*



*Meets the American Disabilities Act Guidelines for toilet height with seat and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from left-hand side.*

*Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe. WaterSense compliant.*

*These dimensions and specifications are subject to change without notice.*

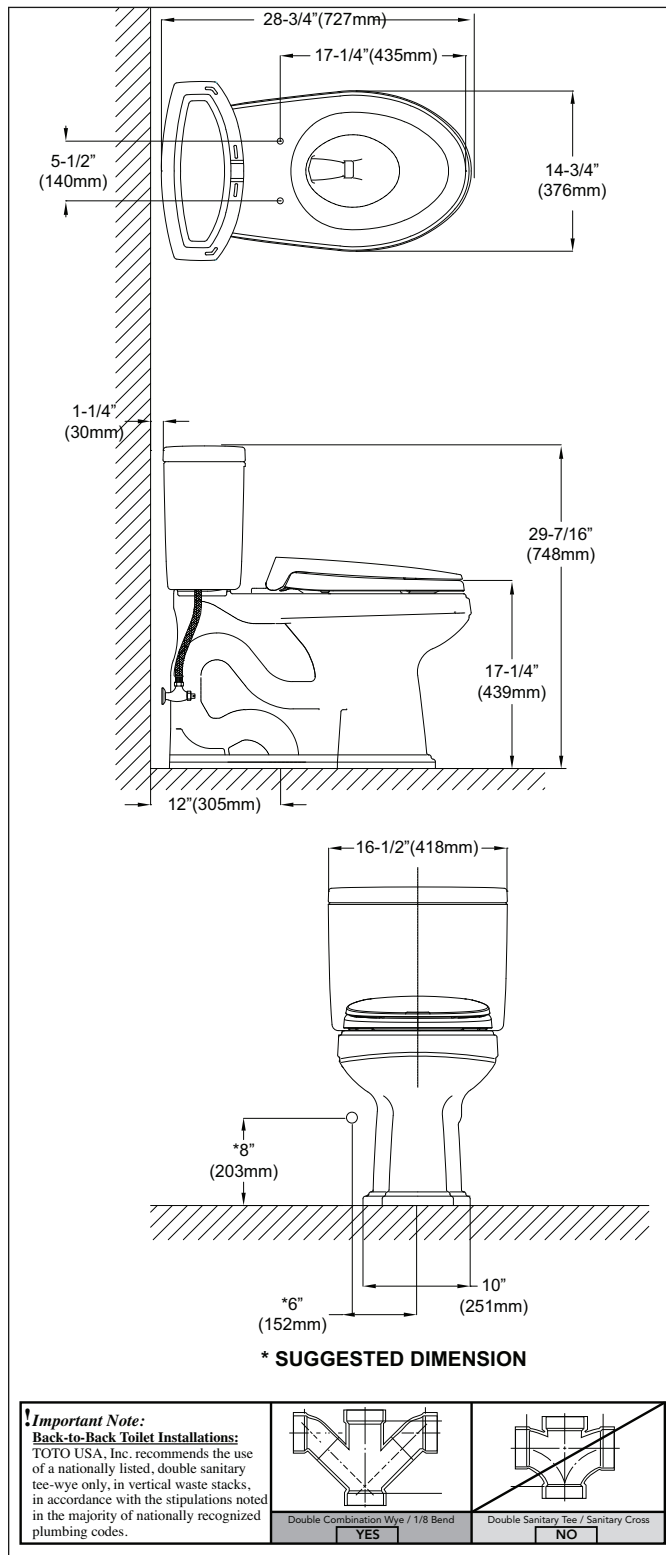

CST454CEFG - Drake® II Two-Piece Toilet

# TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com  
 Printed in U.S.A. © TOTO LTD. 05/08 #A10510

Printed on recycled paper

REV 03/09