

CATALOG NUMBER	TYPE
PROJECT	


LOW VOLTAGE HALOGEN BUTTON LIGHT **HR-88**



Surface Mounted



Recessed Mounted

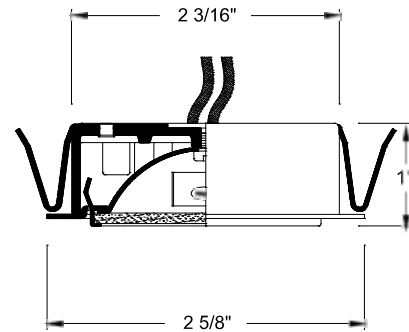

Ordering Matrix							
Model	Series	Finish					
[]	[]	[]					
HR	88	BK	BN	CH	PB	WT	CB

Ordering Example (model number – series – finish): HR-88-CH

Product Details	
Description:	Round surface or recessed mount button light suitable for wood surfaces such as cabinets and displays. Used as a surface mounted unit with the supplied outer housing or used as a recessed unit by removal of the outer housing.
Materials:	Cast aluminum inner housing with a decorative outer steel housing included for surface mounting; outer housing is discarded when used as a recessed fixture. The socket is a bi-pin ceramic with 18 gauge teflon insulated wires. Supplied with 72" lead wire, bi-pin xenon lamp and clear glass lens.
Transformer:	Remote class II required. Ordered separately.
Lamping:	Low voltage halogen JC-20 (20W) included.
Cutout:	2 3/8"
Accessories:	Frosted Lens available, ordering code = LENS-45-FR
Listing:	UL & CUL Listed.

Specification Features
<ul style="list-style-type: none"> Available in a choice of five abrasion resistant paint finishes; BK = Black BN = Brushed Nickel CH = Chrome PB = Polished Brass WT = White CB = Copper Bronze Versatile choice for low profile source lighting. Not intended for ceilings. Dimmable with electronic low voltage dimmers. Suitable for damp location 5 year W.A.C. Lighting product warranty.

Compatible Class II Transformers (sold separately):					
EN-1260-R2		EN-1260-RB2		EN-1260-P-AR	
Electronic Transformer UL Listed Class II Component 120v input – 12v output 60 watt maximum		Electronic Transformer UL Listed Class II 120v input – 12v output 60 watt maximum		Electronic Transformer UL Listed Class II 120v input – 12v output 60 watt maximum	