


# InvisiLED® Pro

## 24V High Output LED Tape Light

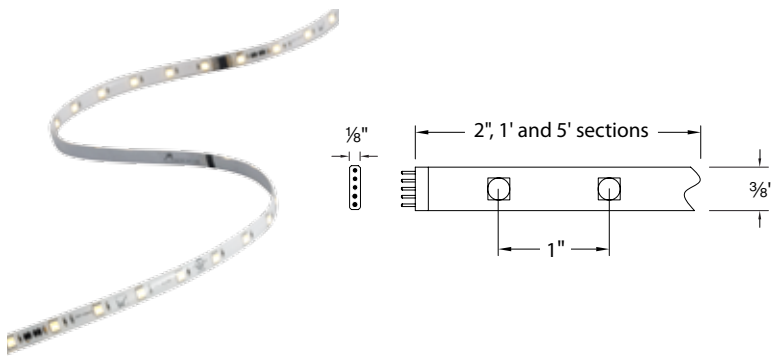

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Professional grade white tape light that delivers optimal color consistency and brightness. A powerful lumens output and dimming capabilities make this system ideal for task or accent lighting applications.

### FEATURES

- Low power consumption with high lumen output
- Available in 3000K and 4500K color temperatures
- Sold in 2in, 1ft and 5ft sections
- Minimum run length of 1' and maximum of 33'
- May be field cut every 2" at the end of a run
- Three mounting methods provided for different surfaces
- 50,000 hours of potential life
- 5 year WAC Lighting product warranty

### SPECIFICATIONS

**Construction:** Flexible, silicone cased tape light. Peel and stick 3M construction adhesive on back. Indicating marks on back for field cutting, may be cut every 2" at the end of a run.

**Power Supply:** Designed for use with WAC 24V AC/DC electronic Class 2 transformers (order separately). Remote and plug-in at 60W or 96W.

**Light Source:** 12 LED diodes per foot. Runs on 24V at 3W per foot. 3000K and 4500K color temperatures. 50,000 hr potential life.

**Dimming:** Dimmable with electronic low voltage (ELV) dimmer.

**Operating Temperature:** -4°F – 122°F (-20°C – 50°C), relative humidity 95%.

**Standards:** UL & CUL Listed for damp locations.

### FIXTURE PERFORMANCE

Color Temp	Watts/ft	Lumens/ft	Efficacy (Lm/W)	CRI
3000K	3	200	66.7	85
4500K	3	215	71.7	82

### ORDER NUMBER

#### Warm White

Model #	Length	Color Temp	Qty
<b>LED-T24P-2IN-WT</b>	2 Inch	3000K	1
<b>LED-T24P-1-WT</b>	1 Foot	3000K	1
<b>LED-T24P-5-WT</b>	5 Foot	3000K	1
<b>LED-T24P-2IN-10-WT</b>	2 Inch	3000K	10
<b>LED-T24P-1-40-WT</b>	1 Foot	3000K	40

#### Cool White

Model #	Length	Color Temp	Qty
<b>LED-T24C-2IN-WT</b>	2 Inch	4500K	1
<b>LED-T24C-1-WT</b>	1 Foot	4500K	1
<b>LED-T24C-5-WT</b>	5 Foot	4500K	1
<b>LED-T24C-2IN-10-WT</b>	2 Inch	4500K	10
<b>LED-T24C-1-40-WT</b>	1 Foot	4500K	40

Example: **LED-T24P-2IN-WT**

### WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

### Headquarters/Eastern Distribution Center

615 South Street • Garden City, NY 11530

Phone (516) 515.5000 • Fax (516) 515.5050

### Western Distribution Center

168 Brea Canyon Road • City of Industry, CA 91789



Phone (909) 468.1848 • Fax (909) 468.9958

# InvisiLED® Pro


## 24V High Output LED Tape Light










### POWER SUPPLY

Remote Class 2 AC Transformer		<b>EN-2460-RB2-T</b> <b>EN-24100-RB2-T</b>	60W 96W	6½" × 1⅝" × 1¼" 6⅞" × 1⅝" × 1⅝"	6' lead wire included. Requires a minimum load of 1W. Max run 60W: 25' Max run 100W: 33'
Plug-in Class 2 AC Transformer		<b>EN-2460-P-AR-T</b> <b>EN-24100-P-AR-T</b>	60W 96W	2¾" × 1⅝" × 1¾" 4½" × 1⅝" × 1¾"	6' lead wire included. Requires a minimum load of 1W. Max run 60W: 25' Max run 100W: 33'

### POWER SUPPLY ACCESSORIES

Lead Wire		<b>LED-TC-P-2</b> <b>LED-TC-P-12</b>	2' 12'	Alternative length of lead wires for plug-in or remote power supply. May be field cut for use with a remote power supply.
-----------	---	---	-----------	---

### TAPE LIGHT ACCESSORIES

Joiner Cable		<b>LED-TC-IC2</b> <b>LED-TC-IC6</b> <b>LED-TC-IC12</b> <b>LED-TC-IC72</b>	2" 6" 12" 72"	Connects two sections of InvisiLED® Pro.
4-Way "X" Connector		<b>LED-TC-X</b>	3¾" × 3¾" × 5/16"	"X" connector has one male and three female connectors. <i>(Total run length power consumption cannot exceed transformer load when "X" connector is used).</i>
3-Way "Y" Connector		<b>LED-TC-Y</b>	3¼" × 3¼" × 5/16"	"Y" connector has one male and two female connectors. <i>(Total run length power consumption cannot exceed transformer load when "Y" connector is used).</i>
"L" Connector		<b>LED-TC-L</b>	1⅜" × 1⅝" × ¼"	"L" connector has male and female connectors, use to create 90° right angles.
End cap		<b>LED-TC-EC</b>	½" × ¼" × 3/16" ½" × ½" × ⅛"	Includes 1 cut end cap and 1 male end cap. Use to terminate every run to protect against contaminants.
Mounting Clips (10 pack)		<b>LED-T-CL</b>	½"	For installation on surfaces that are difficult to adhere to. Two mounting clips per foot are recommended for straight runs.
Retrofit Channel		<b>LED-T-RC</b>	36" × ½" × ½"	Use to construct a miniature cove or light baffle in which tape may be concealed. May also be mounted to the channel as a way to change the direction of the projected light.

**WAC Lighting**  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
615 South Street • Garden City, NY 11530  
Phone (516) 515.5000 • Fax (516) 515.5050

**Western Distribution Center**  
168 Brea Canyon Road • City of Industry, CA 91789  
Phone (909) 468.1848 • Fax (909) 468.9958