

# INDUSTRIAL-GRADE MULTI MOUNT FANS

## Common Usages


Smaller industrial or commercial areas such as loading docks, fitness centers, restaurants

Cool employees at workstation(s)  
12" - 14" for individual, 18" for multiple workstations



## FEATURES


- Split capacitor motor is permanently lubricated for little to no maintenance
- Blade, Guard, and Mounts are powder coated steel
- Pivoting action allows fan to be easily directed to needed area
- Can be mounted to walls, ceilings, I-beams and more
- Multiple sizes available

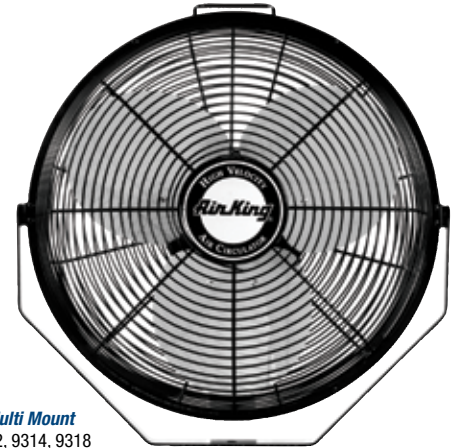

Multi Mount  
9312, 9314, 9318



Secondary support cable included

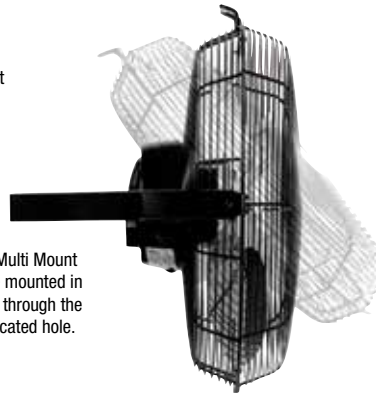

Fan head pivots within Multi Mount Bracket. Bracket can be mounted in virtually any application through the predrilled 3/4" center located hole.



## SPECIFICATIONS

MODEL	DESCRIPTION	HP	BLADE SIZE	CONTROLS	POWER CORD	COMPLIANCE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9318	18" Multi Mount Fan	1/6	18"	Pull Cord	Black, 9' S	ETL, OSHA	21.5"L x 16"W x 21"H	21.4	2.85	\$178.00
9314	14" Multi Mount Fan	1/20	14"	Pull Cord	Black, 9' S	ETL, OSHA	18"L x 8.88"W x 18.25"H	14.3	1.85	\$152.00
9312	12" Multi Mount Fan	1/25	12"	Pull Cord	Black, 9' S	ETL, OSHA	15"L x 12"W x 15"H	11.5	1.39	\$136.00

## PERFORMANCE

MODEL	SPEEDS	VOLTS	PHASES	BEARINGS	CFM			RPM			AMPS			WATTS			DB A		
					HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9318	3	120	Single	Enclosed, Ball	3190	2970	2660	1500	1300	1100	1.52	1.30	1.00	180	150	125	67	58	49
9314	3	120	Single	Enclosed, Ball	1650	1470	1180	1498	1296	934	0.58	0.50	0.44	63	56	48	58	55	48
9312	3	120	Single	Open, Sleeve	1360	1170	1010	1545	1205	900	0.77	0.63	0.53	85	76	64	56	49	42

Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

