UK Tel +44 (0) 1709 888 080 • Germany Tel +49 (0) 7622 6883 0 Australia Tel +61 2 9618 9999 • www.truemfg.com





Model:

TDD-1

**Underbar Refrigeration:** 


Solid Swing Door Direct Draw Beer Dispenser



## TDD-1

- True's direct draw beer dispensers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free
- Oversized, factory balanced, refrigeration system holds .5°C to 3.3°C.
- Exterior all stainless steel countertop, heavy duty, wear resistant laminated black vinyl front and sides. Matching black aluminum back.
- Interior Stainless steel floor with 13 mm reinforced lip and heavy gauge galvanized steel walls. NSF-7 approved for packaged and bottled product.
- One (1) 77 mm diameter stainless steel insulated beer column. Cold air is directed into beer column to reduce foaming and maximize draft beer profits
- Anodized aluminum glass rail provides convenient storage for glasses on top.
- Entire cabinet structure and solid door are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Adjustable, heavy duty PVC coated wire shelf.

## PLAN VIEW

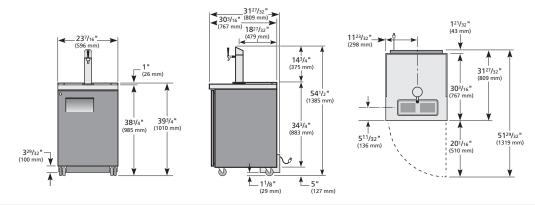

## ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next  $\frac{1}{2}$ ").

	Voltage: 220-240V/50Hz		Chart dimensions rounded up to the next whole minimeter (inches rounded up to the next 78 ).									
				Cabinet Dimensions (mm)			Crated Weight	Capacity		Refrigeration		
	Model	Doors	Shelves	W	D†	H*	AMP	(kg)	50l Kegs	Refrigerant	System	
	TDD-1	1	-	597	809	1010	1,2	93	1	R134A	Forced Air	

<sup>†</sup> Depth does not include 26mm for rear bumpers.

<sup>\*</sup> Height does not include 388 mm for draft arm.