



Model:
TDD-2-CT

Underbar Refrigeration:
Solid Swing Door Club Top Direct Draw Beer Dispenser

TDD-2-CT

- True's direct draw beer dispensers are designed with enduring quality and value. Our commitment to using the highest quality materials and oversized refrigeration assures colder product temperatures and years of trouble free service.
- Oversized, factory balanced, refrigeration system holds .5°C to 3.3°C.
- Exterior - all stainless steel countertop, heavy duty, wear resistant laminated black vinyl front and sides. Matching black aluminum back.
- Interior - Stainless steel floor with 13 mm reinforced lip and heavy gauge galvanized steel walls. NSF-7 approved for packaged and bottled product.
- Two (2) 77 mm diameter stainless steel insulated beer columns. Cold air is directed into beer column to reduce foaming and maximize draft beer profits.
- Anodized aluminum glass rail provides convenient storage for glasses on top.
- Entire cabinet structure and solid door are foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Adjustable, heavy duty PVC coated wire shelf.

PLAN VIEW

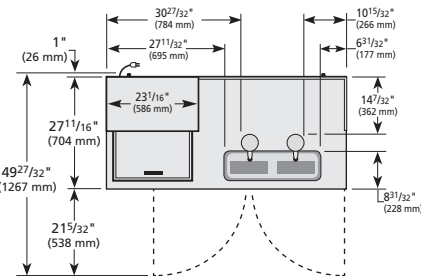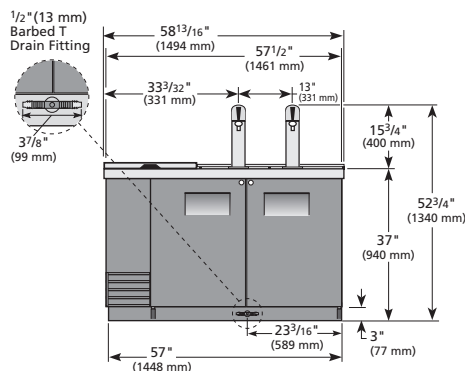

ROUGH-IN DATA

Voltage: 220-240V/50Hz

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the next 1/8").

| Model | Doors | Shelves | Cabinet Dimensions (mm) | | | AMP | Crated Weight (kg) | Capacity 50l Kegs | Refrigerant | Refrigeration System |
|----------|-------|---------|-------------------------|-----|-----|-----|--------------------|-------------------|-------------|----------------------|
| | | | W | D† | H* | | | | | |
| TDD-2-CT | 2 | 1 | 1496 | 704 | 978 | 4,2 | 159 | 2 | R134A | Forced Air |

† Depth does not include 26mm for rear bumpers.

* Height does not include 388 mm for draft arm.