











Stainless Frame

Black Frame

Integrated Frame

ame Integrated Solid

Additional Options

Stainless lock model available



Stainless Lock Model


Key Features

- Convection cooling system provides a quick cool down and consistent temperature
- Extended lower interior maximizes storage options
- Black interior
- LowE coated, argon gas filled, dual thermopane glass door provides protection from harmful UV Light
- Stainless steel full-wrap door and handle (7/8" diameter)
- Stainless steel grille (stainless model), black metal grille (black & integrated models)
- Five, three-quarter extension, black wine racks

- Digital touch pad control
- Temperature range: 34°F to 60°F
- Bright white LED lighting
- Volume of 5.5 cu ft holds up to 48 wine bottles (750 ml)
- Field reversible door is shipped right-hand hinged
- Integrated model requires 3/4" custom door panel and handle (not supplied by U-Line)
- Built-in or freestanding
- Four adjustable leveling legs

Model Details


Model	Voltage/Hz	Door Swing	Finish	Shipping Weight
UHWC124-SG01A	115 / 60	Field Reversible	Stainless Frame	125 lb
UHWC124-SG31A	115 / 60	Field Reversible	Stainless Frame (Lock)	125 lb
UHWC124-IG01A	115 / 60	Field Reversible	Integrated Frame	115 lb
UHWC124-IS01A	115 / 60	Field Reversible	Integrated Solid	110 lb
UHWC124-BG01A	115 / 60	Field Reversible	Black Frame	125 lb

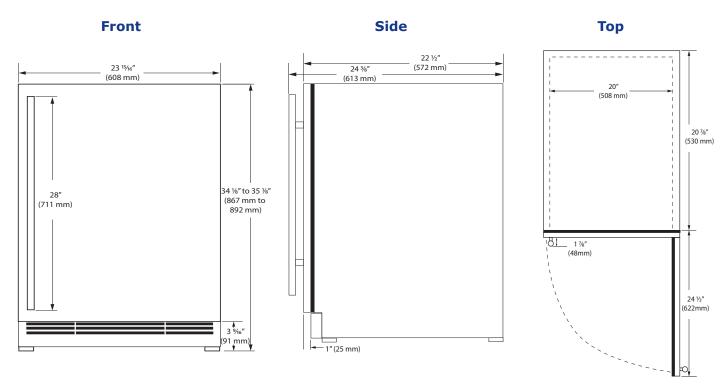


Specifications

Model	HWC124	
Amps: Running (115 v)	1.2 A	
Capacity: Wine Bottle (750 ml)	48	
Capacity: Volume (cu ft)	5.5	
Dimensions: Product Depth	22 ½" / 572 mm	
Dimensions: Product Height	34 ½" / 867 mm	
Dimensions: Product Width	23 ¹⁵ / ₁₆ " / 608 mm	
ENERGY STAR (Glass)	No	
ENERGY STAR (Solid)	Tier 3	
Energy Consumption: Avg. Per Year	310 kWh	
Panel Height	30 ¹ / ₄ " / 768 mm	
Panel Thickness	3/4" / 20 mm	
Panel Type	2 ³ / ₄ " / 70 mm Frame or Solid Panel	
Panel Width	23 ¾" / 603 mm	
Refrigerant Type	R600a (1.34 oz)	
Sabbath (Star K Certified)	Yes	
Temperature Range	34°F to 60°F	

Back



Cabinet Cut-Out



Warranty

- 1 Year (parts & labor) / 5 year sealed system (parts)
- + Additional 1 Year (parts & labor) warranty at no cost with product registration

See complete warranty for details



Installation Notes

- 24" cutout width sufficient if door protrudes beyond adjacent cabinetry
- No additional clearance is needed for ventilation
- Do not obstruct front grille air flow









