

# 1/4 HP INDUSTRIAL GRADE FAN COMPONENTS

Industrial Grade Fan Components allow the freedom to customize to suit your needs and reduce your assembly time and cost.

## PRODUCT INFORMATION

### Motor

3-speed, 1/4 HP, 120V, 1 phase, totally enclosed, ball bearing, permanently lubricated, permanent split capacitor

### Controls

Rear mounted pull cord switch

### Power Cord

Black, 10', 3-conductor, SJT type

### Coating

Blade, Guard, and Mounts are powder coated steel


### Compliance

ETL, OSHA

### Oscillation

90° (models 9135H, 9125H)

**Assembled Head**  
9130H, 9135H, 9124H,  
9125H, 9120H, 9121H

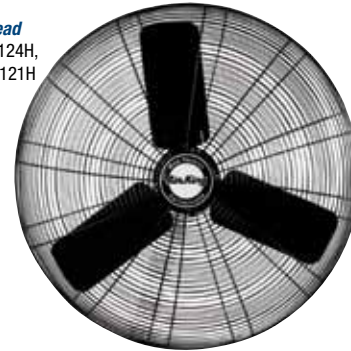

**I-Beam Mount**  
9100i



**Ceiling Mount**  
9100CM



**Wall Mount**  
9100WC



**Pedestal Wheel Kit**  
9100WB



**Pedestal Pole & Base**  
9100PB



## SPECIFICATIONS

MODEL	DESCRIPTION	BLADE SIZE	PRODUCT DIMENSIONS	WEIGHT (LBS.)	CUBE (FEET)	LIST PRICE
9130H	30" Assembled Head	30"	33.5"L x 16.5"W x 33.25"H	53.7	10.56	\$330.00
9135H	30" Assembled Oscillating Head		33.5"L x 16.5"W x 33.25"H	56.3	10.56	\$355.00
9124H	24" Assembled Head	24"	27"L x 16.5"W x 27"H	46.8	6.96	\$310.00
9125H	24" Assembled Oscillating Head		27"L x 16.5"W x 27"H	47.2	6.96	\$330.00
9120H	20" Assembled Head	20"	23.5"L x 15"W x 23.5"H	29.8	6.87	\$290.00
9121H	20" Assembled Oscillating Head		23.5"L x 15"W x 23.5"H	31.6	6.87	\$320.00
9100PB	Pedestal Pole & Base	N/A	30"L x 30"W x 42.5"H	31.4	1.04	\$140.00
9100WC	Wall Mounting Bracket	N/A	13"L x 2"W x 12.5"H	5.3	.19	\$40.00
9100CM	Ceiling Mounting Bracket	N/A	4.5"L x 4.5"W x 15"H	3.6	.28	\$75.00
9100i	I-Beam Mounting Bracket	N/A	32.5"L x 2"W x 21"H	9.8	.78	\$187.50
9100WB	Pedestal Wheel Kit (4" diameter)	N/A	4"L x 4"W x 9"H	2.2	.36	\$40.00

## PERFORMANCE

TYPE	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
30" 1/4 HP <sup>1</sup>	7400	6360	4980	1040	902	860	2.40	1.86	1.46	255	200	154	75	71	67
24" 1/4 HP <sup>2</sup>	5130	4490	3670	1060	925	745	2.39	1.86	1.52	252	199	157	72	69	64
20" 1/4 HP <sup>3</sup>	3960	3630	3020	1061	956	747	2.39	1.86	1.52	248	201	161	64	61	55

<sup>1</sup> Includes models 9170H, 9175H • <sup>2</sup> Includes models 9171H, 9174H • <sup>3</sup> Includes model 9020H, 9121H  
Tested in accordance with AMCA standard 230-99. • Specifications are subject to change.

