

Style That Works Better



CADET® 3 FLOWISE® RIGHT HEIGHT® ELONGATED TOILET

BARRIER FREE

CADET 3 FLOWISE RIGHT HEIGHT ELONGATED TOILET

□ 2235.128US

- Made in U.S.A.
- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (4.8 Lpf/1.28 gpf)
- Meets EPA WaterSense® criteria
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- 16-1/2" rim height for accessible application
- Elongated siphon action jetted bowl
- Fully-glazed 2-1/8" trapway
- Generous 9" x 8" water surface area
- Close-coupled tank with flat tank cover for superior storage
- Oversized 3" flush valve with chemical resistant flapper
- Chrome trip lever
- Speed Connect® tank-to-bowl coupling system
- Sanitary dam on bowl with four point tank stabilization
- Bolt caps included
- 100% factory flush tested
- 5 year warranty

□ 2235.813US

· Same as above except with trip lever on right hand side

□ 3016.001US Right Height Elongated Bowl ☐ 4021.128US Tank

Nominal Dimensions:

768 x 438 x 768mm (30-1/4" x 17-1/4" x 30-1/4")

Fixture only, seat and supply by others

Alternative Tank Available:

☐ 4021.813US Tank complete with trip lever located on right side

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's
- Buy American/ARRA Compliant

To Be Specified:

- Color: White
- ☐ Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover with easy lift off feature
- Seat: #5284.016 Elongated EverClean solid plastic seat and cover
- Seat: #5321.110 EverClean Elongated Seat with Slow Close Snap-Off Hinges
- Supply with stop:



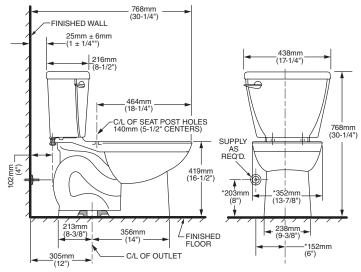

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided page



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE **BUILDING FACILITIES-CHECK LOCAL CODES.**





Buy American/ARRA Compliant