

**FREE SPIRIT  
WHIRLPOOL AND BATHING POOL**☐ **2466.018W Whirlpool**

- Acrylic with fiberglass reinforcement
- Unique design provides comfort for two people with dual lumbar areas and built-in armrests
- Pre-leveled tub bottom
- Single speed, self-draining pump/motor
- Ten multi-directional and flow-adjustable jets
- Color-matched jets and trim
- Deck-mounted air-actuated control
- Two silent air volume controls
- Quick Connect Safe-T-Heater connection system

☐ **2466.018WM002 Whirlpool**

- Same as above, but with chrome trim

☐ **2466.002 Bathing Pool****Nominal Dimensions:**

1829 x 1372 x 591mm

(72" x 54" x 23-1/4")

**Compliance Certifications -****Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR PRODUCT DIMENSIONS  
AND SPECIFICATIONS

**To Be Specified - Required:**


- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: (specify finish)

**To Be Specified - Optional:**

- ☐ Heater\*: 9075.120 or EZHEAT-100
- ☐ Universal Tile Bead Kit: 751755-100

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

**\* NOTE:** The Whirlpool heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

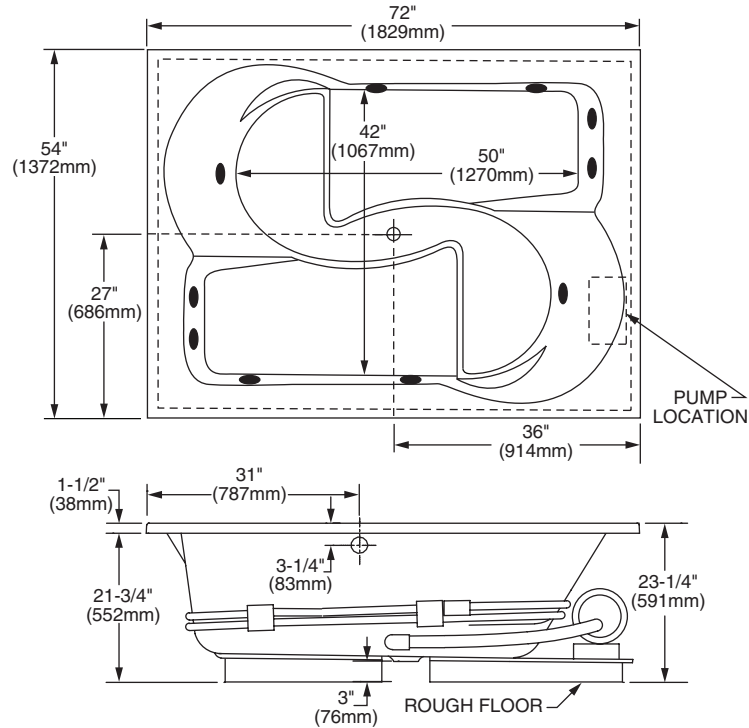

GENERAL SPECIFICATIONS FOR 2466	
INSTALLED SIZE	72 x 54 x 23-1/4 In. (1829 x 1372 x 591mm)
WEIGHT	130 Lbs. (59 Kg.)
WEIGHT w/WATER	1213 Lbs. (550 Kg.)
GAL. TO OVERFLOW	130 Gal. (492 L)
MIN. OPERATING GAL.	92 Gal. (348 L)
BATHING WELL AT SUMP	50 x 42 In. (1270 x 1067mm)
BATHING WELL AT RIM	64-1/2 x 43-3/4 In. (1638 x 1111mm)
WATER DEPTH TO OVERFLOW	15-1/2 In. (394mm)
FLOOR LOADING	45 Lbs./Sq.Ft. (219 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	27.5
CUBE (FT <sup>3</sup> )	62
ELECTRICAL SPECIFICATIONS	
PUMP	2.1 HPR, 15 AMPS, 120V.

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL MUST BE PROVIDED BY OTHERS.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING.

SUPPLY PIPING NOT INCLUDED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.