

Style That Works Better

STUDIO CADET® 3 FLOWISE® ELONGATED TOILET

VITREOUS CHINA

STUDIO CADET® 3 FLOWISE® ELONGATED TOILET

2588.101

- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (4.8 Lpf/1.28 gpf)
- Meets EPA WaterSense® criteria
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Features the Cadet® 3 Flushing System
- Elongated siphon action jetted bowl
- Fully-glazed 2-1/8" trapway with 2" ball pass
- Generous 9" x 8" water surface area
- Close-coupled tank with flat tank cover for superior storage
- Oversized 3" flush valve with chemical resistant flapper
- · Chrome trip lever
- Speed Connect® tank-to-bowl coupling system
- Sanitary dam on bowl with four point tank stabilization
- 2 color-matched bolt caps
- 100% factory flush tested
- Lifetime warranty on chinaware and 5 year warranty on mechanical parts

☐ 3014.128 E	Elongated Bowl
--------------	----------------

☐ 3014.001 Elongated Universal Bowl

☐ 4202.101 Tank

Nominal Dimensions:

767 x 456 x 731mm (30-1/4" x 18" x 28-3/4")

Fixture only, seat and supply by others

Alternate Tank Configurations Available:

☐ 4202.151 Tank complete with Aquaguard Liner


Compliance Certifications Meets or Exceeds the Following Specifications:

 ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Linen ☐ Black
- □ Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover with easy lift off feature
- ☐ Seat: #5284.016 Elongated EverClean® solid plastic seat and cover
- □ Seat: #5321.110 EverClean® Elongated Seat with Slow Close Snap-Off Hinges
- Supply with stop:



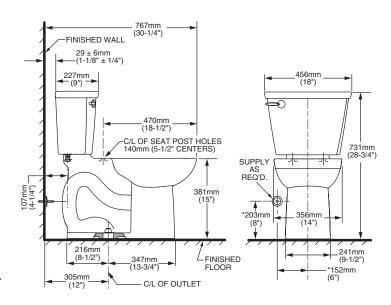

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.





