

### LUCIA™ WALL-HUNG LAVATORY

- Vitreous china
- 2" high Integral back splash
- For concealed arm installation
- Integral side shelves
- Shown with optional vitreous china shroud/  
knee contact guard 0059.020 available

- 0145.001** Center hole only
- 0145.501** Center hole only with sealed overflow
- 0145.100** Lavatory center hole & shroud combination
- 0145.105** Lavatory center hole with sealed overflow & shroud combination
  
- 0059.020 Shroud/Knee Contact Guard**  
(Vitreous China)

#### Nominal Dimensions:

20-1/2" (520mm) deep, 35-1/2" (900mm) wide

**Note:** Must be installed with concealed arm carrier.  
Please allow proper wall depth clearance for concealed  
arm carrier support.

#### Compliance Certifications -

##### Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous  
China Fixtures

#### To Be Specified:

- Color:  White
- Optional Vitreous China Shroud/Knee  
Contact guard: 0059.020
- Faucet\*:
- Faucet Finish:
- Supplies:
- 1-1/4" Trap:
- Nipple:

\* See faucet section for additional models available




MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-  
LINES AND ANSI A117.1 ACCESSIBLE AND USABLE  
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.  
Top of front rim mounted 864mm (34") from finished floor.




Shown: 0145.100 Lavatory center hole & shroud

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

- 0145.001 Center Hole
- 0145.501 Center Hole with sealed overflow

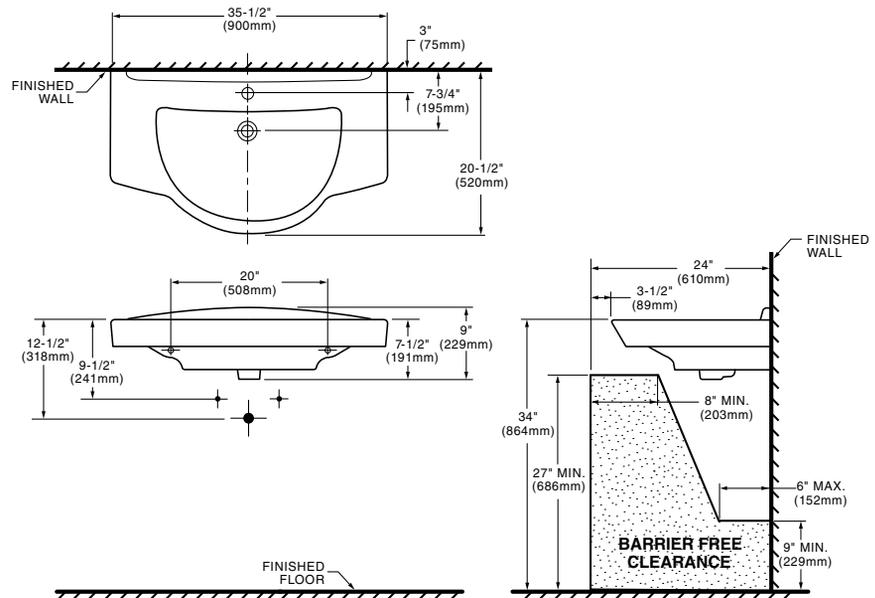

- 0145.100 Center Hole & Shroud
- 0145.105 Lavatory center hole with sealed overflow & shroud combination

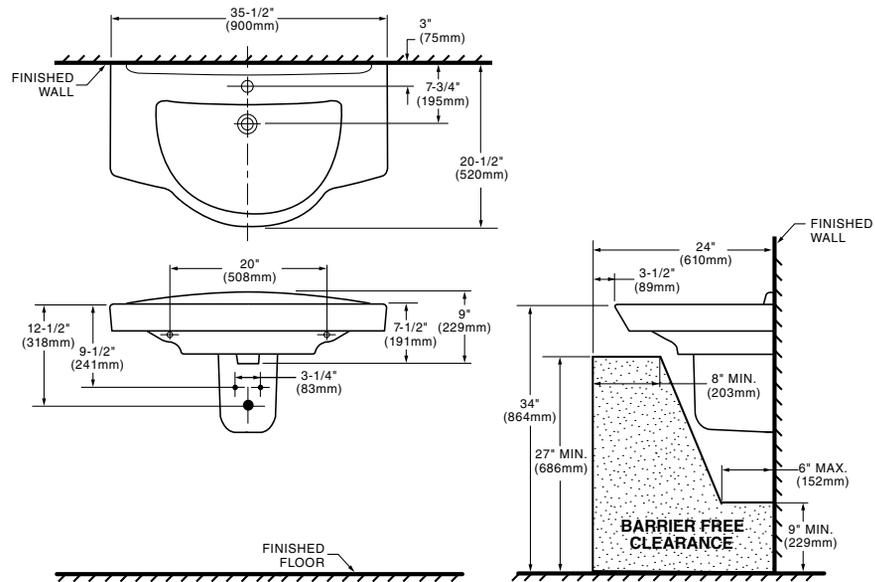

**NOTES:**

ALLOW PROPER WALL DEPTH CLEARANCE FOR CONCEALED ARM CARRIER SUPPORT. MUST BE INSTALLED WITH CONCEALED ARM CARRIER. LOOSE KEY ANGLE STOPS, LESS WALL ESCUTCHEONS. SUPPLIES REQUIRED. DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

Top of front rim mounted 864mm (34") from finished floor.