


BRIZO™



KITCHEN FAUCETS

- Floriano™ Collection
- Single Handle Deck Mount
- 2-Function Pull-Down
- Single, 2 or 3 Hole Sink Applications
- Centermount or 8" (203 mm) Centers with Optional 10" (254 mm) Escutcheon
- Optional Vase Interchangeable with Soap Dispenser

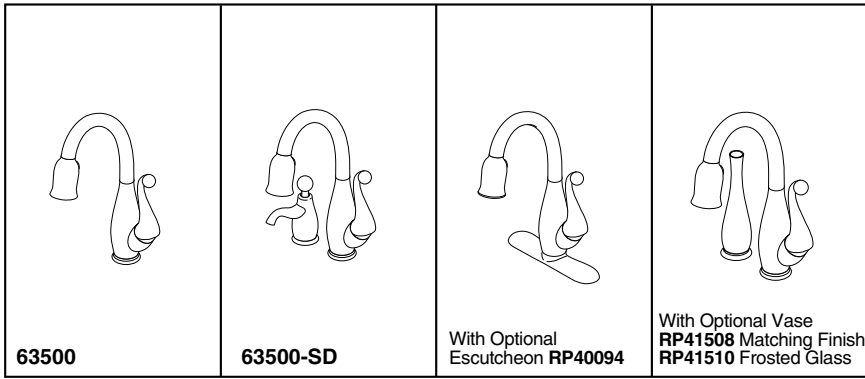

Submitted Model No.: _____

Specific Features: _____

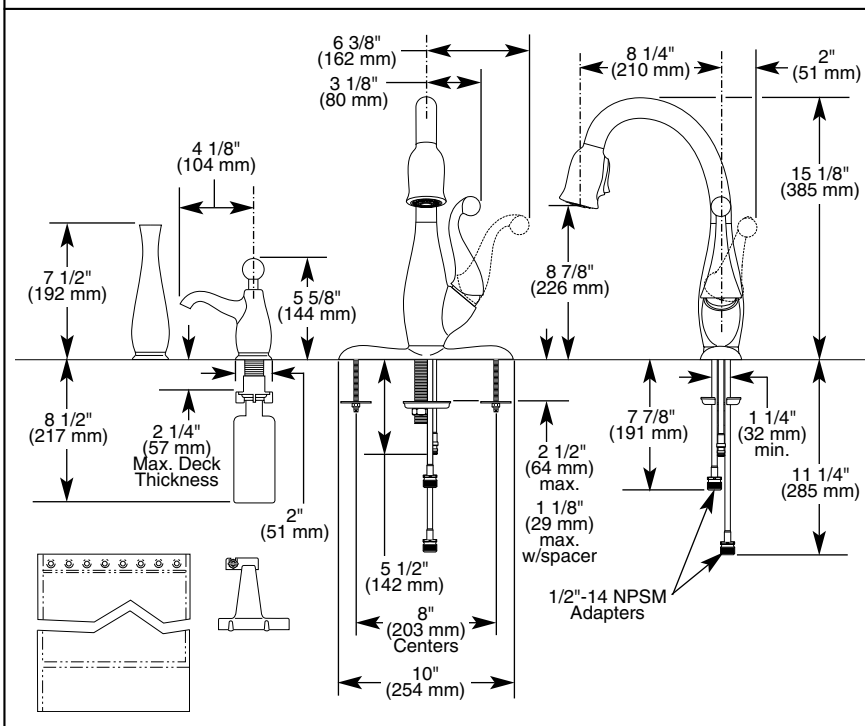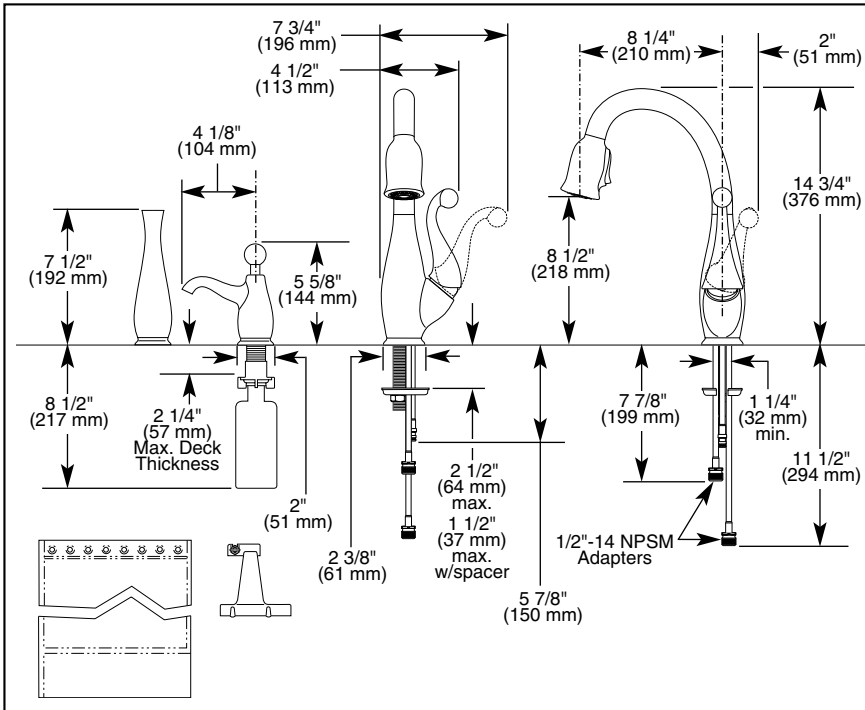


COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Single handle, 2-function pull-down kitchen faucets for exposed mounting on single, two and three hole sinks.
- Solid brass fabricated body.
- 14 3/4" (376 mm) high, 8 1/4" (210 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Touch-Clean® sprayhead.
- Quick connect hoses.
- Pull-down wand operates in an aerated or spray mode via an ergonomic toggle diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Tangle-free bag for hose.
- Twist and lock mechanism eliminates spray head wobble.
- Thin deck mounting aid to help secure product if used on thin sinks.
- Dual integral check valves in sprayer assembly.
- Integrated removable debris screen in sprayer assembly.
- Disposable hose lead to aid installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose guards integral to casting reduces wear and noise on hose.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring and 10" (254 mm) escutcheon to help alignment and aid installation.

Note: See 63510-* for matching bar/prep.

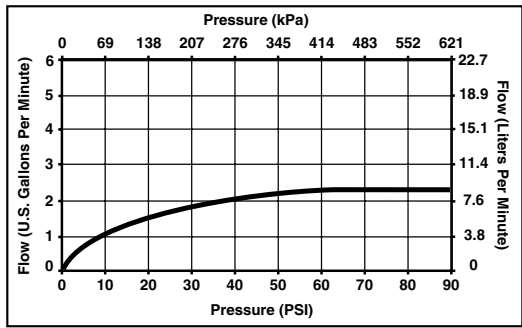

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

| Standard Features | 63500-* | 63500-SD |
|-----------------------------------------------------------------------------------------------|---------|----------|
| Washerless | ◆ | ◆ |
| Centermount Installation | ◆ | |
| Two Hole Installation | | ◆ |
| 2 1/2" (64 mm) Thick Deck Installation Capability | ◆ | ◆ |
| Touch-Clean® Spray Head | ◆ | ◆ |
| Lever Handle | ♿ | ♿ |
| 14 3/4" (376 mm) High, 8 1/4" (210 mm) Long, Spout Swings 360°. | ◆ | ◆ |
| 3/8" O.D. Straight, Staggered Copper Supply Tubes – 7 7/8" (199 mm) and 11 1/2" (294 mm) Long | ◆ | ◆ |
| Standard with 1/2"-14 NPSM Adapters | ◆ | ◆ |
| Wand Matches Finish | ◆ | ◆ |
| Soap/Lotion Dispenser | | ◆ |
| Red/Blue Graphics on Handle Button to Indicate Hot/Cold Temperature | ◆ | ◆ |

*To specify finish add suffix

Available Finishes

| Suffix | Finish |
|--------|-------------------------------|
| PC | Polished Chrome |
| SS | <i>Brilliance</i> ® Stainless |
| WH | White |

Delta Faucet Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2004 Masco Corporation of Indiana