



READ AND SAVE THESE INSTRUCTIONS
INSTRUCTIONS FOR MOUNTING THESE CENTER STEM
LIGHT FIXTURE: K1K, K2K, K4C

WARNING: To reduce the possibility of electrical shock, be sure that the power is turned off at its source (fuse or circuit breaker). All electrical components must be installed in accordance with national and local electrical codes. To reduce the risk of fire and electrical shock, this light fixture should be used only with UL, ETL & CUL Certified Casablanca ceiling fans.

IMPORTANT: Before discarding any packing material locate the following items:

Fixture	Light Bulb(s)	Dimensions (w/glass)	Weight
K4C	4 - 60w A15 med base	9"h x 23"w	2 lbs
K1K	1 - 100w A19 med base	7"h x 9"w	3 lbs
K2K	1 - 100w A19 med base	6"h x 6"w	3 lbs

INSTALLATION

1. Remove the cover from fan by removing two brass 8-32 screws and save these screws for re-attaching cover. Remove plastic wire nuts from switch housing wires and strip 1/2" insulation from both wires (black or blue, and white). Remove the center plug from the cover. See FIG. 1

NOTE: *If installing this light fixture on a 3 Speed pull-chain model fan, a separate pull-chain switch (included with the fan) must be installed. Refer to the following installation instructions, otherwise skip to step 4.*

2. Remove the plastic plug from the fan switch housing. Install the light on-off switch by inserting the chain through hole, from the inside. Pass the switch threads into the hole and screw the knurl nut onto the switch. Hand tighten firmly. See FIG. 2

3. Attach the blue wire from the fan to one of the blue wires on the switch by twisting the bare ends of the wires together. Secure the splice by threading on one of the wire nuts provided. Test the secureness of the splice by pulling on the wire nut.

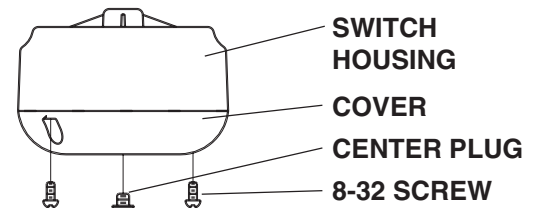


FIG. 1

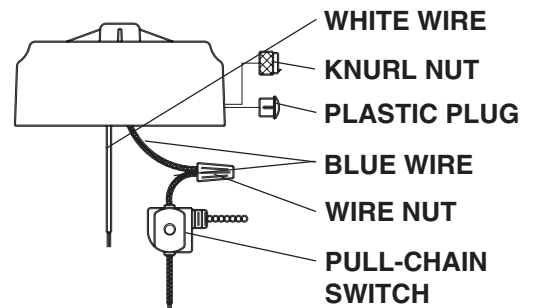


FIG. 2

4. Guide the two wires from the light fixture through the center plug-hole in cover and then thread the light fixture into the center hole. Hand tighten firmly. See FIG. 3

5. While holding light fixture up to the fan, attach the wires from the fan switch housing and the wires from the light fixture together (black-to-black or blue-to-black and white-to-white) by twisting the bare ends of the wires together. Then secure the splices by threading on the wire nuts provided. Test the secureness of each splice by pulling on the wire nut.

6. Re-attach the cover and light fixture to the fan switch housing using the two brass 8-32 screws, insuring guide pins are properly located into fan switch housing.

Caution: Make sure no wires are pinched between cover and switch housing. Tighten the screws to secure light fixture.

7. Install glass (not included) by loosening the thumbscrews on each shadeholder, align glass inside shadeholder as far as it will go and tighten thumbscrews equally around the glass. Make sure the glass is snug and locked-down tight so that the glass will not rattle when the fan is in operation.

8. Install the appropriate light bulbs.

Do not exceed the maximum wattage indicated on the light fixture.

9. Connect the fob pull chain to the light pull chain.

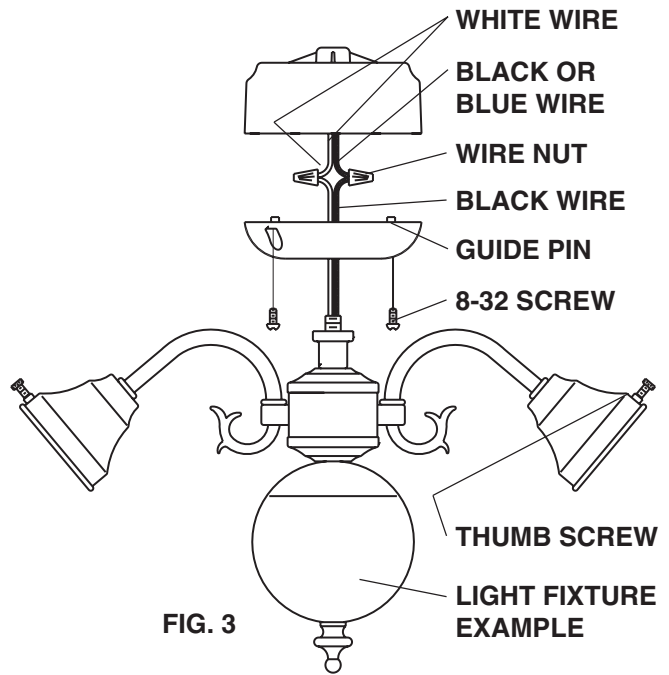


FIG. 3