




COMMERCIAL PLASTIC SEATS

# MODEL 9500CT

- ELONGATED SEAT, OPEN FRONT LESS COVER
- SOLID PLASTIC
- STA-TITE®, COMMERCIAL FASTENING SYSTEM™



Ring thickness is 1"  
 Ring thickness including the bumper is 1-3/16"


Seats shall be No. \_\_\_\_\_ as manufactured by Church Seats. Seats shall be extra heavy weight and injection molded of solid plastic. Seats shall be open front less cover for elongated bowl and feature large mold-ed-in bumpers. Seats shall have STA-TITE®, Commercial Fastening System™, featuring concealed check hinges with 300 Series stainless steel posts and pintles that stop seat 11 degrees beyond vertical.

Color to be \_\_\_\_\_.  
 (Specify white or fixture manufacturer's color.)


Hinges shall be 9500CT / 9500SSCT.  
 (Circle model based on description below.)

**9500CT** Concealed check hinge stops seat 11° beyond vertical.  
**9500SSCT** Self-sustaining, concealed check hinge holds seat in any raised position up to 11° beyond vertical.

**\*\* ANSI Z124.5 section 5.1.2 Tests have shown that this product will support weights up to 500 pounds.\*\* (Contact Church Seat Co., for test data)**

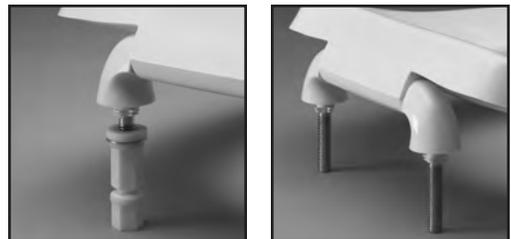

## STATITE®

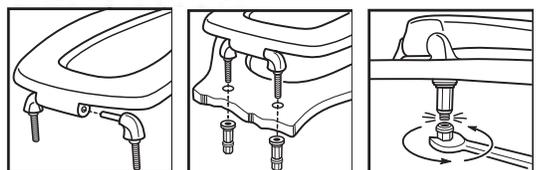

Assemble hinges.

Finger-tighten fastening nuts.

Using wrench, tighten until lower portion shears off.