


SPECIFICATIONS

ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

Description

- · 2 handle with solid brass spout
- Soft Touch Personal Shower™ with integral diverter system
- Spout plug for pressure testing & plaster guard

Flow & Valving



Standards

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms (lever handle only) [].

Warranty

Danze faucets are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects



D301002 (shown) MELROSE™

With 10" CC fixed rough-in valve:

D301211 (w/o Personal Shower)

D301002 (w/Personal Shower) D301202 (w/o Personal Shower) D301011 (w/Personal Shower)

With widespread rough-in valve:

D309702 (w/Personal Shower) D300902 (w/o Personal Shower) D309711 (w/Personal Shower) D300911 (w/o Personal Shower)

Available Colors & Finish

- Chrome
- Brushed Nickel (BN)
- Chrome with Polished Brass Accents (CPBV)

Handle Suffix:

11: lever handle

02: acrylic handle






Trim Kits:

D309702T (w/Personal Shower) D300902T (w/o Personal Shower) D309711T (w/Personal Shower) D300911T (w/o Personal Shower)

Special Packaging

- This product also available with valve packaged separate from trim.
- Use with rough-in valve: D210000BT (10" CC fixed) OR D215000BT (widespread)
- Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports

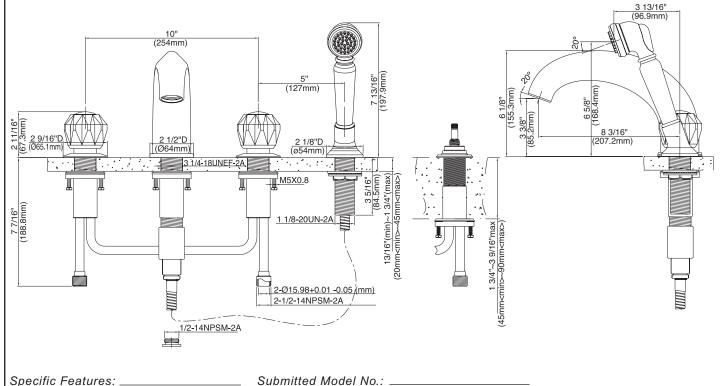

Globe Union America Corp., 2 Territorial Court, Suite A, Bolingbrook, IL. 60440, USA



1/2"

Specific Features:

6-Ø15.98+0 -0.05

6-1/2-14NPSM

SPECIFICATIONS

ROMAN TUB FAUCET ROUGH-IN VALVES

Critical Dimensions : Rough-in D210000BT (fixed) & rough-in valve D215000BT (widespread)

10" (254mm) 38 1 15/16" (49.8mm) 1 11/16" (43.5mm) 2-9/16-24UNEF 3-1 1/4-18UNEF 13/16"(Min)~1 13/16"(Max) (20Min~45Max mm) Ţ 9 3/8" (238.6mm) 6 13/16" (172.3mm) 1 13/16"~3 1/2"(Max) (45Min~90Max mm) 1/2" (13mm) 1/2 -14NPSM 2-Ø15.98+0 -0.05 1/2 -14NPSM 2-1/2-14NPSM WIDESPREAD ROUGH-IN VALVE 1 15/16" (49.8mm) 38 1 11/16" (43.5mm) 2-9/16-24UNEF 3-1 1/4-18UNEF 15/16" (25mm) 13/16"(Min)~1 13/16"(Max) (20Min~45Max mm) 9 3/8" (238.6mm) 6 13/16" (172.3mm) 1 13/16"~3 1/2"(Max) (45Min~90Max mm)

10" CC ROUGH-IN VALVE (FIXED)

Globe Union America Corp., 2 Territorial Court, Suite A, Bolingbrook, IL. 60440, USA

1/2 -14NPSM

1/2 -14NPSM

Submitted Model No.: