

SPECIFICATIONS

TWO HANDLE THERMOSTATIC SHOWER VALVE WITH TRIM

Description

- 1/2" combination IPS/Copper sweat on all three ports
- · 3-port shower valve with stops
- With temperature limit adjustment

Flow & Valving

See Chart

Standards

- ASME A112.18.1
- CSA B125
- ASSE 1016
- Listed IAPMO/UPC
- Energy policy act of 1992

2 7/16~2 15/16"

 ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms 🔈

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



D560144

SIRIUS™

0

4"

Available Colors & Finish


• Chrome Brushed Nickel (BN)

Trim Kit :


(for use w/thermostatic shower valve) D560144T

Special Packaging

• Model numbers for trim kit items include the suffix "T".



ė

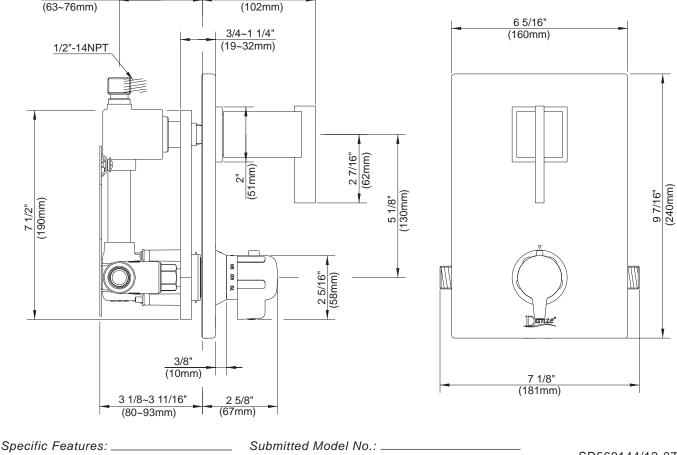

Danze, Inc., 2500 Internationale Parkway, Woodridge, IL 60517, USA WWW.DANZE.COM