



Model No: 28C4233-S6

COMPLIES WITH:

- · CSA certified.
- Complies to ASME Standard A112.18.1.
- Verified to <0.25% Pb average wetted surface regulations
- (Contact Delta Representative for State and/or Local Approvals)
- 3" lever blade handle ADA compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force





NOTES:

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product as of Nov. 1, 2009.

The Product Numbers have NOT changed.

SPECIFICATION:

• 203 mm (8") centers cast brass wallmount sink faucet

Sink Faucet Wallmount

Centers adjustable from 7.75" to 8.25" unless AC option selected

8" Wallmount LESS Integral Check Stops -CER-

Two handle

TECK®

- Polished chrome plated finish
- · LESS integral stops
- CER-TECK® 1/4 turn ceramic disk cartridges
- Spout: S6 9" Tubular Swing Spout(S6)
- Outlet#: 3 Vandal Resistant Aerator Outlet- 1.5 USGPM (5.7 L/min) Flow Rate at 60 psi- pressure compensating
- Handle#: 3 76 mm (3") Lever Blade Handles-ADA Compliant-Metal-Color indexed-Vandal Resistant screws


OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced March 05, 2012.



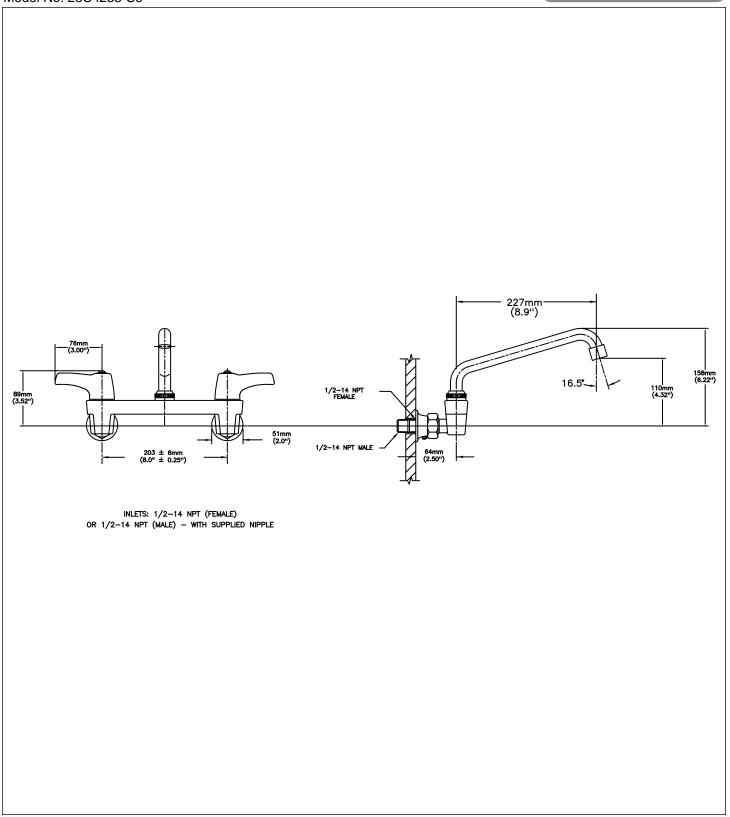

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced March 05, 2012.