

Metering Urinal Valve for Washdown Urinals

TECK®

DELTA
COMMERCIAL

SPECIFICATION: (example)

- **HEAVY-DUTY**, back inlet supply
- **CAST BRASS** valve for 3/4" IP spud urinal
- Polished chrome plated finish
- Delta® metering slow close cartridge
- Chrome plated union inlet stop
- Brass oscillating lever handle, coupling nuts, inlet cover tube
- Set screw wall flange, spud flange, outlet tube
- **1/2" universal FIP/copper sweat inlet**
For Washdown Urinals

☐ **86T505** 



86T505

SPECIFICATION: (example)

- **HEAVY-DUTY**, back inlet supply
- **CAST BRASS** valve for 3/4" IP spud urinal
- Polished chrome plated finish
- Delta® metering slow close cartridge
- Chrome plated brass coupling nuts, inlet cover tube
- Wall flange, spud flange, outlet tube
- **1/2" universal FIP/copper sweat inlet**
For Washdown Urinals

☐ **86T500**

with vandal resistant brass push button

☐ **86T502** 

with brass oscillating lever handle



86T500

SPECIFICATION: (example)

- **HEAVY-DUTY**, top inlet supply
- **CAST BRASS** valve for 3/4" IP spud urinal
- Polished chrome plated finish
- Delta® metering slow close cartridge
- Chrome plated brass coupling nuts, spud flange, outlet tube
- **1/2" universal FIP/copper sweat inlet**
For Washdown Urinals

☐ **86T501**

with vandal resistant brass push button

☐ **86T503** 

with brass oscillating lever handle



86T503

SPECIFICATION: (example)

Vacuum breaker assembly for above urinal valves

☐ **86T610**



86T610

Engineer/Architect Approval

Model Specified:

Approval:

Date:


Refer to www.specselectonline.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Approvals:

- CSA certified
- Lever Handle ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- IAPMO listed


(Contact Delta Representative for State and/or Local Approvals.)

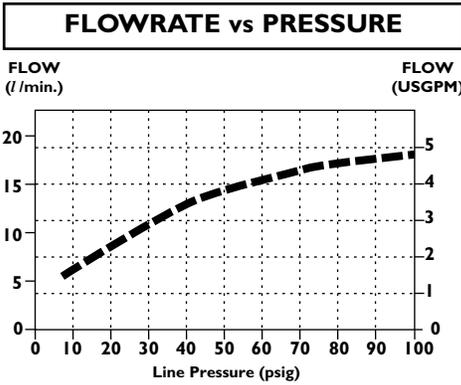


Extensions Available for Inlet Centers and for Outlet Tube Heights

INLETS - 1/2" FIP/Copper
Note: Measurements may vary ± 6mm (0.25")

86T505

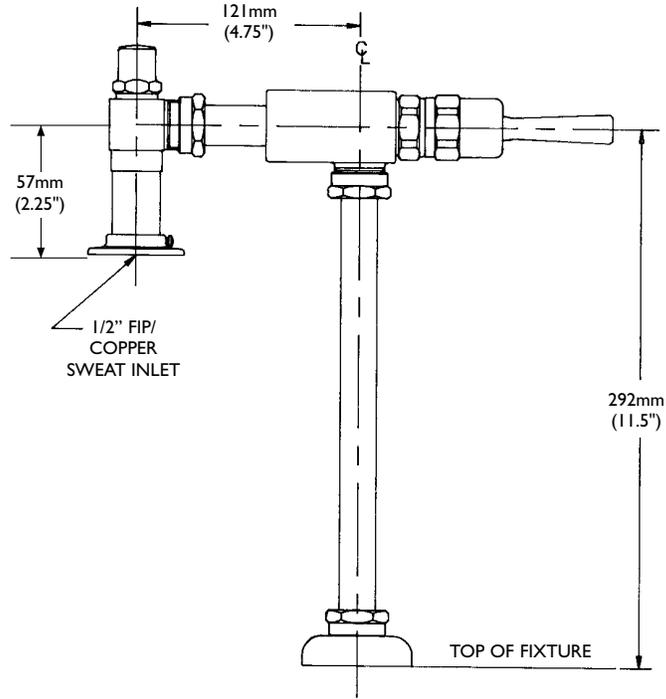

86T505 with 86T610

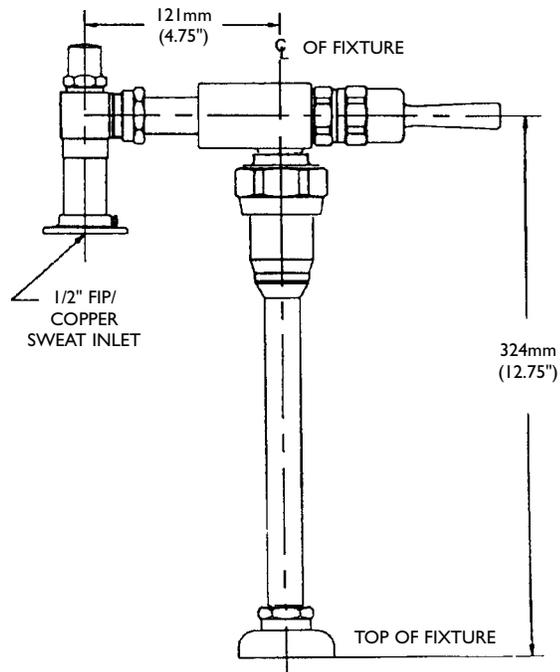

Refer to www.specselectonline.com for individual models.

Note: Use this page front and back as a product submittal sheet.