


Submitted Model No.:______Specific Features:______



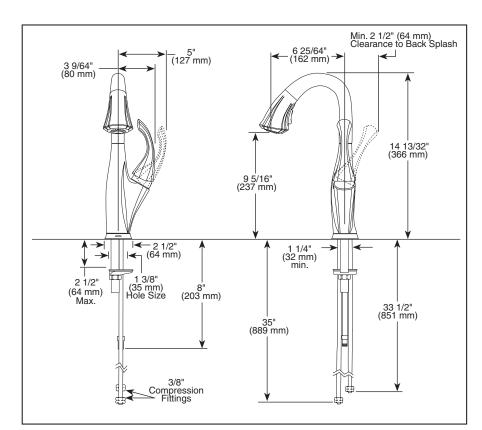

BAR/PREP FAUCETS

- Addison[™] Pull-Down Collection
- Single Handle Deck Mount
- 1 Hole Sink Applications
- Diamond Seal® Technology
- Integrated Supply Tubes
- Touch₂0® Technology

STANDARD SPECIFICATIONS:

- Centermount or 8" (203 mm) centers.
- 14 13/32" (366 mm) high, 6 25/64" (162 mm) long, spout swings 360°.
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- Control shall return to neutral position when faucet is turned off.
- Touch-Clean[®] 2 function (stream/spray) sprayhead.
- Quick Snap[®] connect hoses.
- Magnetic docking system secures sprayer to spout.
- Pull-down wand operates in an aerated or spray mode via an ergonomic toggle diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Hose lead to aid installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring to help alignment and aid installation.
- 3/8" O.D. straight, staggered PEX supply tubes, 33 1/2" (851 mm) and 35" (889 mm).
- Sprayhead includes Multi-Flow™ feature which allows for a temporary flow rate increase to 1.75 gpm.
- Delta Touch₂0[®] Technology controls water flow.
- On-Off indicator light signals when batteries are low.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.







COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1

 Verified compliant with .25% weighted average Pb content regulations.

