

**SPECIFICATION (example)**

- Wall mount electronic lavatory faucet
- Sensor detects user's hand to activate water flow
- Hardwire 24 VAC to 9 VDC (transformer required – order separately)
- Adjustable maximum run time
- Adjustable sensor range

**DEMD-402**

- Electronic faucet for cold or pre-mixed water – 8" spout

**DEMD-404**

- Electronic faucet for cold or pre-mixed water – 6" spout

**OPERATION**
**Sensing Range:**

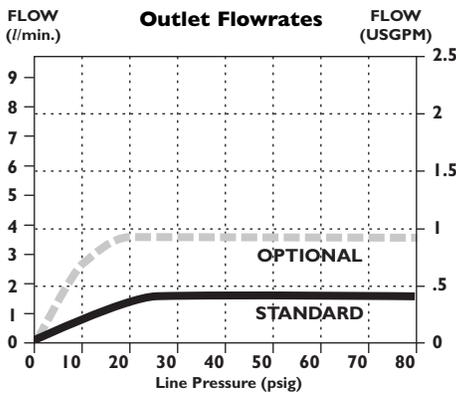
- Factory set to 8.6" (220 mm)
- Adjustable from 3.15" to 11.8" (80 mm to 300 mm)

**Maximum Run Time:**

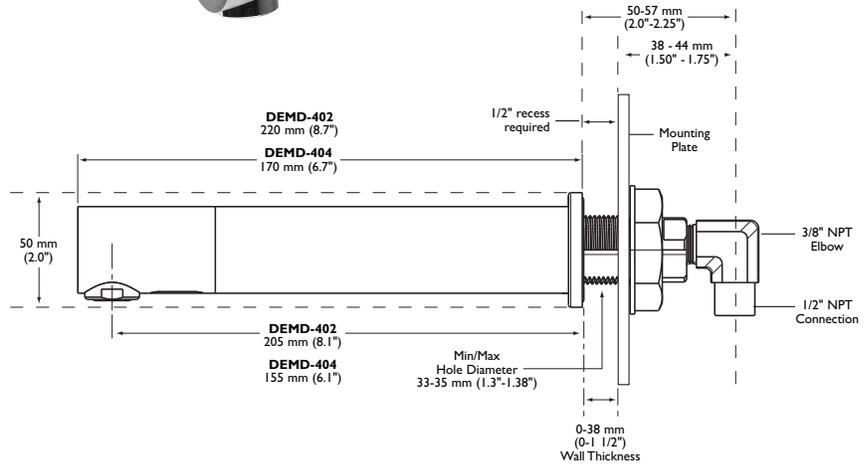
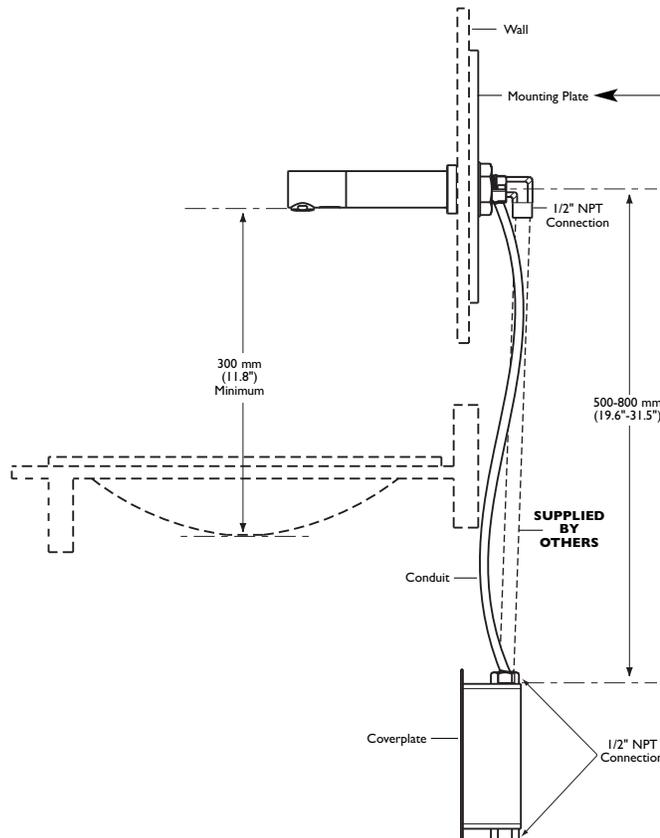

- 90 seconds, adjustable with remote control

**060967A**

- Remote Control (Optional)

**FLOWRATE vs PRESSURE**

**Approvals:**

- IAPMO listed, certified to ASME A112.18.1 /CSA B125.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. handle operating force.

**ELECTRONIC WALL MOUNT LAVATORY FAUCET**

**MOUNTING PLATE**


Note: Measurements may vary  $\pm 6$ mm (0.25")

Refer to [www.spectselect.com](http://www.spectselect.com) for individual models.

Note: Use this page as a product submittal sheet.