

SPECIFICATION (example)

- Deck mount electronic lavatory faucet
- Touch operated
- 6 1.5V AA Batteries (included)
- Adjustable maximum run time
- On-off function
- Internal LED warning indicator when battery is low

DEMD-800

- Electronic faucet for cold or pre-mixed water

OPERATION

Maximum Run Time:

- 60 seconds, factory set to 8 seconds

060958A

- DEMD Plug-In Transformer 120 VAC to 9 VDC (Optional)


060974A

- DEMD Converter 24 VAC to 9 VDC (optional) (transformer required – order separately)


060585A

- Optional 4" forged coverplate

FLOWRATE vs PRESSURE

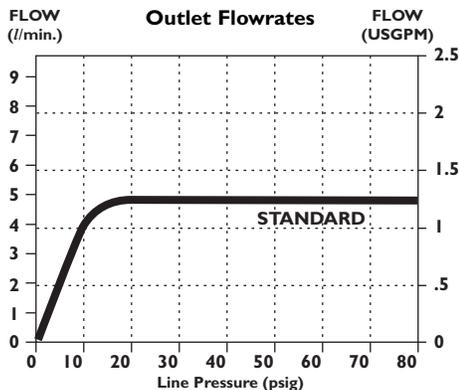

ELECTRONIC LAVATORY FAUCET DEMD-800

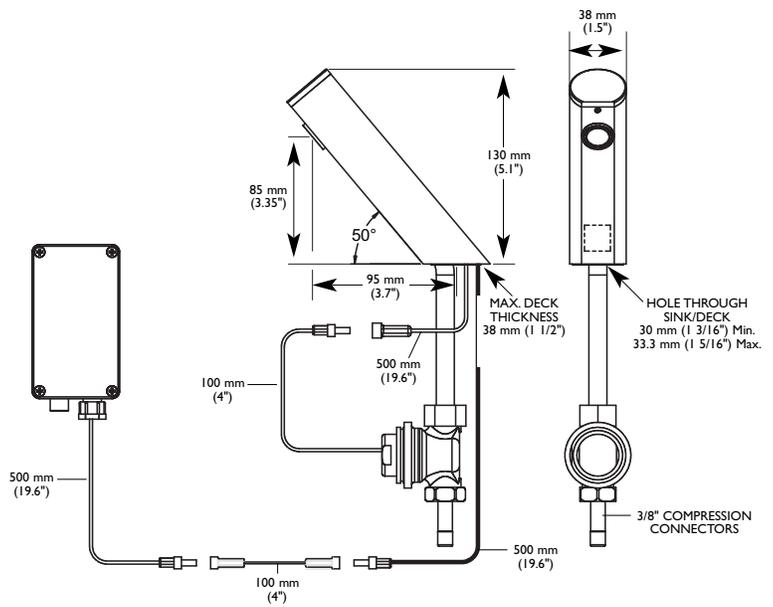


Approvals:

- IAPMO listed, certified to ASME A112.18.1 /CSA B125.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. handle operating force.

Note: Pressure reducing valve recommended for water pressure more than 116 PSI.

Note: Measurements may vary ± 6mm (0.25")

OPTIONAL 4" FORGED COVERPLATE

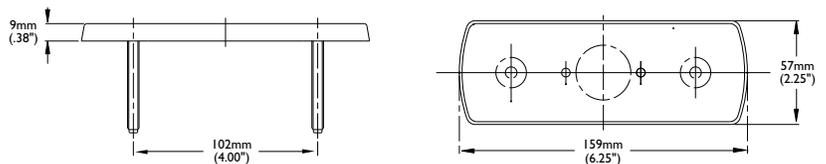

Refer to www.spectselect.com for individual models.

Note: Use this page as a product submittal sheet.