

## **Hose Cocks**

Single needle valve assembled in deckmount turretassembled shank-brass locknut raised lockwasher for positive grip- vandal resistant locking pins on turret(can be removed in field if not required)

# Model No: W6214ST

### **COMPLIES WITH:**

- CSA approved to CAN/CSA B125 with compliance to ANSI/ASME A112.18.1M.
- (Contact Delta Representative for State and/or Local Approvals)

### SPECIFICATION:


- Needle hose cock
- Renewable structure containing floating stainless steel needle and renewable seat
- Universal 10 serration nozzle with 3.2mm(1/8")outlet-non-removable
- Provides fine control-3 full turns to open
- Exponential rate of change in flow throughout handle turning range
- Single needle valve assembled in deckmount turret-assembled shank-brass locknut, raised lockwasher for positive grip- vandal resistant locking pins on turret(can be removed in field if not required)
- Chrome Finish
- Handle#: A Black Plastic Handle
- Assembled Shank: Shank (L)
- Overall length 4.44" [was SH1](2.84" exposed)
- Indexed For: ST Steam(Black)
- Shank With 1/4" IP tailpiece and coupling nut(Standard)

### **OPERATION:**

Not Available

(Dimensional drawing on following page)



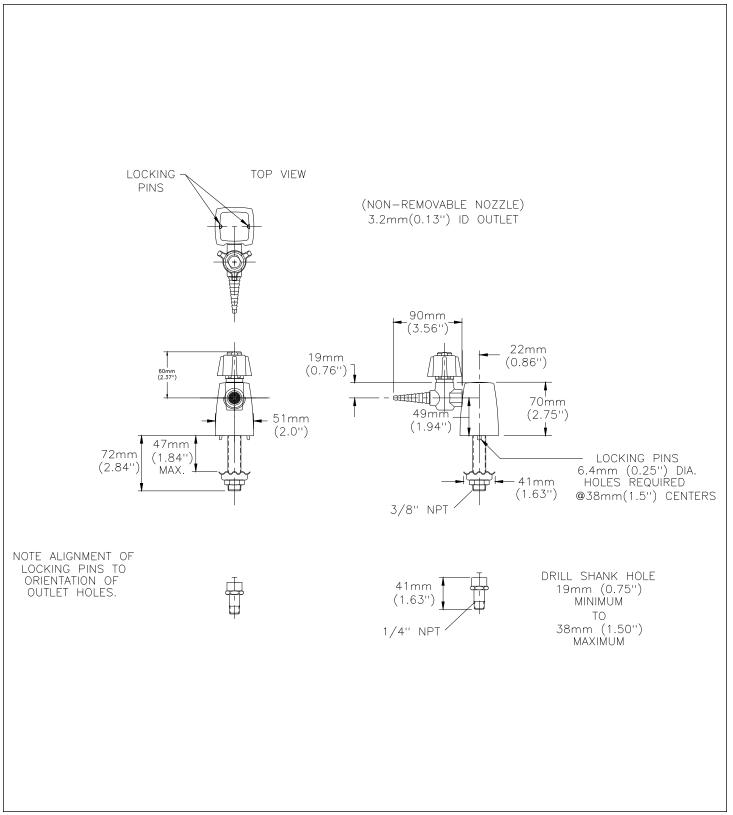

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.