

Hose Cocks

Two needle valves assembled at 90 deg. in wallmount "Y" connection-assembled shank-brass locknut raised lockwasher for positive grip

Model No: W6279ST

COMPLIES WITH:

- CSA approved to CAN/CSA B125 with compliance to ANSI/ASME A112.18.1M.
- (Contact Delta Representative for State and/or Local Approvals)

SPECIFICATION:

- Needle hose cock
- Renewable structure containing floating stainless steel needle and renewable seat
- Universal 10 serration nozzle with 3.2mm(1/8")outlet-non-removable
- Provides fine control-3 full turns to open
- Exponential rate of change in flow throughout handle turning range
- Two needle valves assembled at 90 deg. in wallmount "Y" connectionassembled shank-brass locknut, raised lockwasher for positive grip
- Chrome Finish
- Handle#: A Black Plastic Handle
- Assembled Shank: Shank (N) overall length 2.38" [was SH3] (1.88" exposed)
- Indexed For: ST Steam(Black)
- Shank With 1/4" Tailpiece & Coupling


OPERATION:

Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.



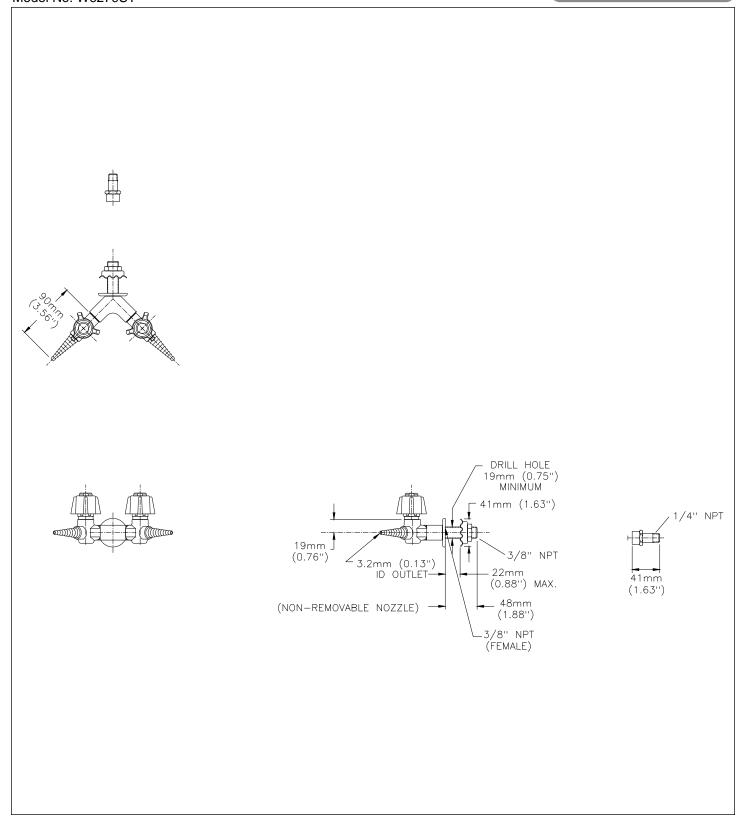

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area.