

## **Single Water Faucets**

Deckmount single faucet with rigid/swivel spout fits a maximum 1-1/4" diameter hole

# Model No: W6600-10-R24

### **COMPLIES WITH:**

- CSA certified to B125 with compliance to ASME A112.18.1
- (Contact Delta Representative for State and/or Local Approvals)
- Tested and approved under ASSE 1001 and CSA B64.1.1

#### SPECIFICATION:


- All brass body with vandal resistant locking pin to prevent damage to counter top(can be removed in field if not required)
- Assembled shank
- Brass locknut and raised lockwasher to provide positive gripping during installation
- Teck Lab compression structure
- Chrome plated brass renewable seat
- 1/4" NPT tailpiece and coupling nut
- Spout can be oriented to suit left, center, or right side handle operation
- Deckmount single faucet with rigid/swivel spout,fits a maximum 1-1/4" diameter hole
- Chrome Finish
- Spout: R24 203 mm (8") Angle VB Spout
- Outlet: w/ 1/4" ID Serrated Nozzle Outlet(No Dash or -10 series)
- Handle#: B Two Arm Metal
- Indexed For: CW Cold Water(Green)-60 psi max

## **OPERATION:**

Not Available

#### (Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 03, 2011.

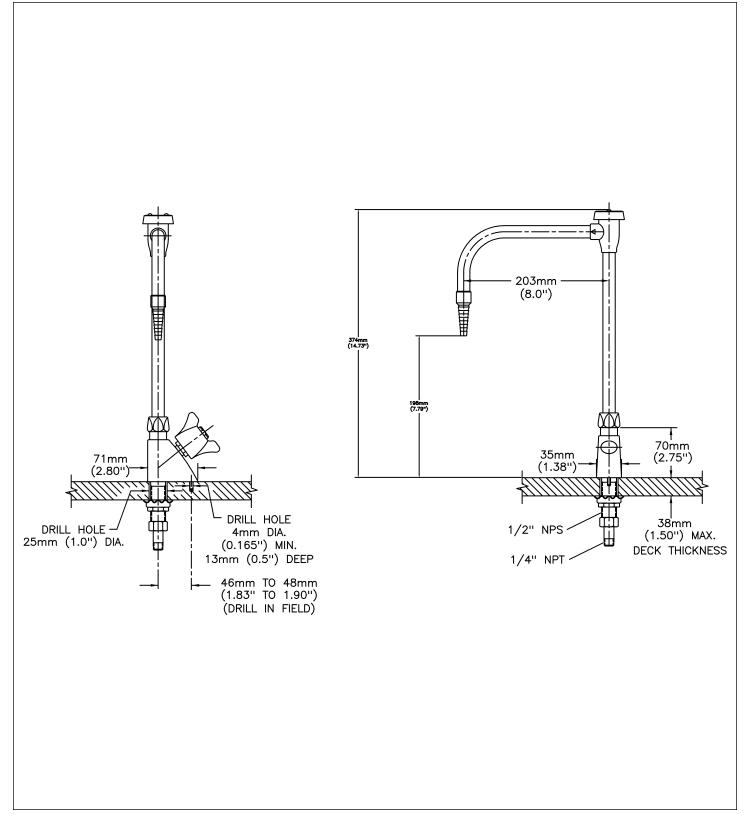

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced November 03, 2011.